





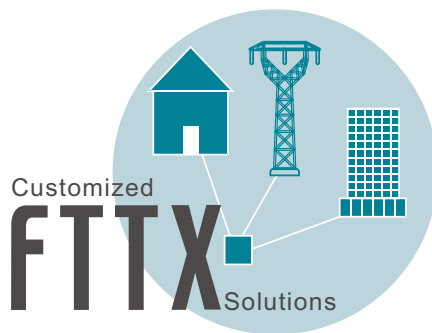

Products & Services

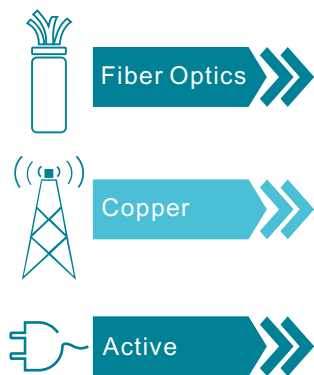

- ◆ Customised FTTx Solutions
- ◆ Optical Fiber Distribution Frames
- ◆ Patch Panels
- ◆ Distribution Boxes (Optical & Copper)
- ◆ Cross-Connect Cabinets (Optical & Copper)
- ◆ Outdoor Cabinets
- ◆ Network Rack Cabinets
- ◆ Optical Cable Splice Closures
- ◆ Optical Cable Tray / Raceway Systems
- ◆ Power Solutions (PDU & Heat Exchangers & Rectifier Modules & Switching Power Supply)
- ◆ Optical Splitters
- ◆ Optical Distribution Modules / Splice Tray
- ◆ Fiber Optic Adapters / Patch Cords / Pigtails
- ◆ Optical Tools / Accessories
- ◆ Digital Distribution Frames
- ◆ Busbar Trunking System

Qualification



ISO 14001



ISO 9001




Quality Guarantee



Alibaba Assessment

History of LongXing

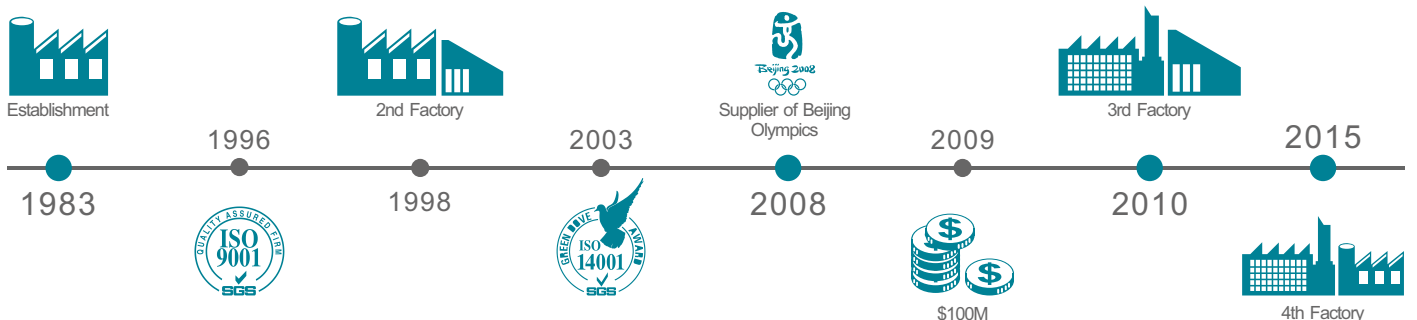


Splice Tray

LongXing ST series splice tray is used in optical distribution frame, distribution box, and splice closures, which is engineered for use with indoor or outdoor splice hardware with both loose tube and tight-buffered optical cable designs.

» For more designs and details:
Splice Tray:<http://www.lxtelecom.com/fiber-optics/splice-tray.html>


ST-1D08A 8 Cores

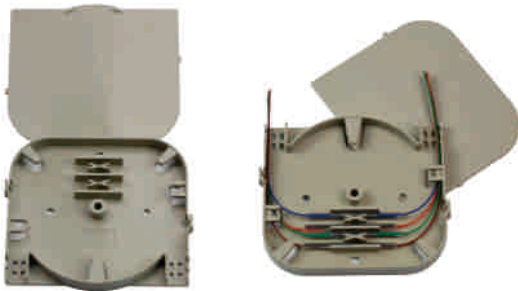

Dimensions and Capability

Dimensions (W*H*D)	95mm*85mm*14mm
Capacity	8 splices
Optional Accessories	Heat Shrink Tubes, Heat Shrink Splice Holder
Max diameter of entry cable	8.5mm
Weight	0.038KG


ST-1D12A 12 Cores

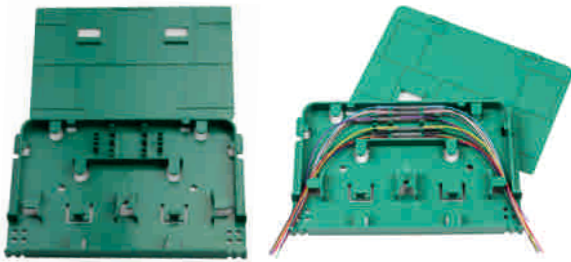

Dimensions and Capability

Dimensions (W*H*D)	160mm*100mm*17mm
Capacity	12 splices
Optional Accessories	Heat Shrink Tubes, Heat Shrink Splice Holder
Max diameter of entry cable	9.0mm
Weight	0.070 KG


ST-1D24A 24 Cores

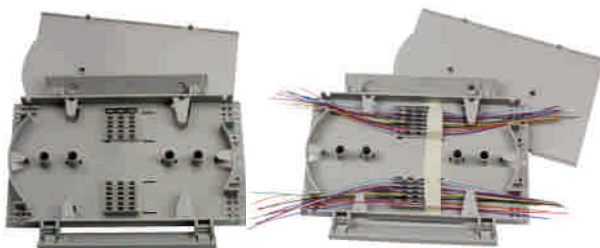

Dimensions and Capability

Dimensions (W*H*D)	210mm*156mm*18mm
Capacity	24 splices
Optional Accessories	Heat Shrink Tubes, Heat Shrink Splice Holder
Max diameter of entry cable	14.0mm
Weight	0.175 KG


ST-1D24B 24 Cores

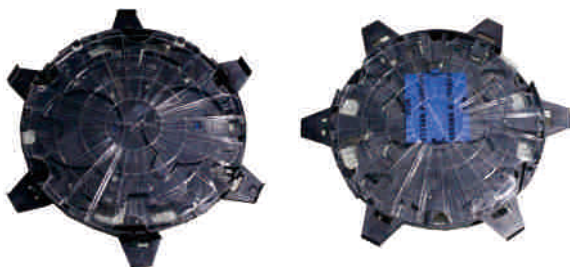

Dimensions and Capability

Dimensions (Diameter*Height)	Φ 212mm, δ16mm
Capacity	24 splices
Optional Accessories	Heat Shrink Tubes, Heat Shrink Splice Holder
Max diameter of entry cable	10.0mm
Weight	0.175 KG

ST-1D24C 24 Cores

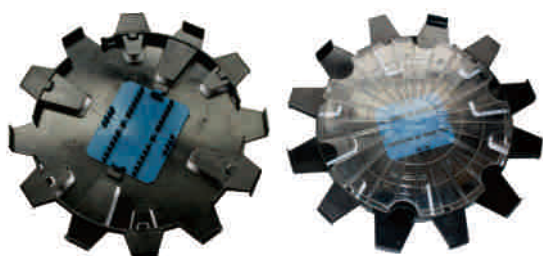

Dimensions and Capability

	ST-1D24C-1	ST-1D24C-2
Dimensions (Diameter*Height)	Φ 170mm,δ10mm;	Φ 220mm,δ14mm
Capacity	12 or 24 splices	
Optional Accessories	Heat Shrink Tubes, Heat Shrink Splice Holder	
Max diameter of entry cable	7.0mm;	10.0mm;
Weight	0.100 KG	0.150 KG


ST-2D12A 12 Cores



Dimensions and Capability

Dimensions (W*H*D)	160mm*107mm*10mm
Capacity	12 splices
Optional Accessories	Heat Shrink Tubes, Heat Shrink Splice Holder
Max diameter of entry cable	5.0mm
Weight	0.05 KG


ST-2D12B 12 Cores

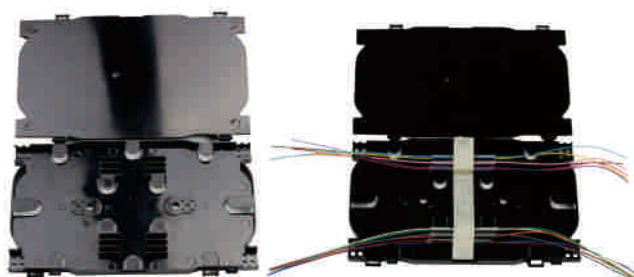

Dimensions and Capability

Dimensions (W*H*D)	170mm*105mm*11mm
Capacity	12 splices
Optional Accessories	Heat Shrink Tubes, Heat Shrink Splice Holder
Max diameter of entry cable	16.5mm
Weight	0.075 KG


ST-2D24A 24 Cores

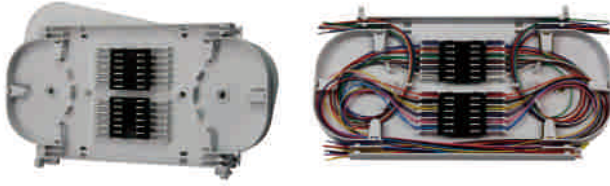

Dimensions and Capability

Dimensions (W*H*D)	224mm*114mm*17mm
Capacity	24 splices
Optional Accessories	Heat Shrink Tubes, Heat Shrink Splice Holder
Max diameter of entry cable	4.0mm
Weight	0.10 KG


ST-2D24B 24 Cores

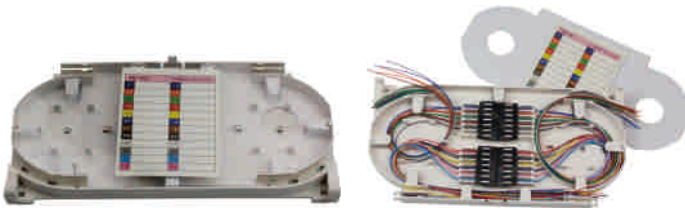

Dimensions and Capability

Dimensions (W*H*D)	223mm*110mm*14mm
Capacity	24 splices
Optional Accessories	Heat Shrink Tubes, Heat Shrink Splice Holder
Max diameter of entry cable	3.5mm
Weight	0.10 KG


ST-2D24C 24 Cores

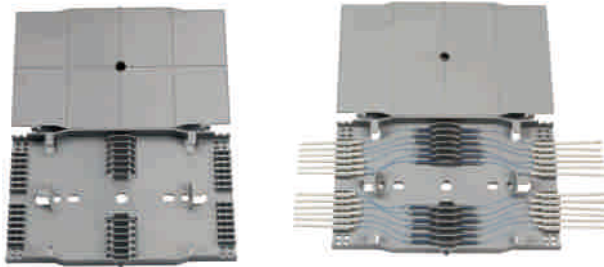

Dimensions and Capability

Dimensions (W*H*D)	157mm*105mm*15mm
Capacity	24 splices
Optional Accessories	Heat Shrink Tubes, Heat Shrink Splice Holder
Max diameter of entry cable	3.0mm
Weight	0.067 KG


ST-2D24D 24 Cores

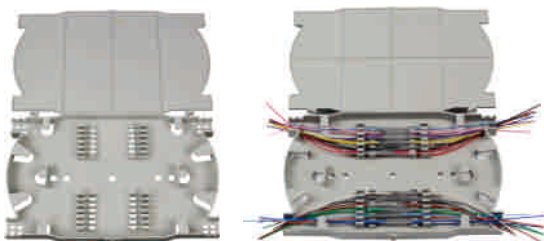

Dimensions and Capability

Dimensions (W*H*D)	160mm*100mm*15mm
Capacity	24 splices
Optional Accessories	Heat Shrink Tubes, Heat Shrink Splice Holder
Max diameter of entry cable	3.0mm
Weight	0.065 KG


ST-2D24E 24 Cores

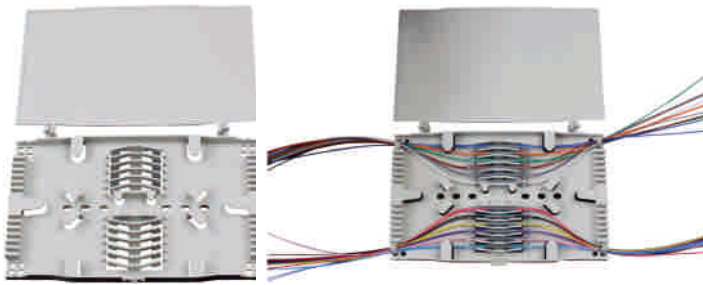

Dimensions and Capability

Dimensions (W*H*D)	180mm*110mm*12mm
Capacity	24 splices
Optional Accessories	Heat Shrink Tubes, Heat Shrink Splice Holder
Max diameter of entry cable	7.0mm
Weight	0.075 KG


ST-2D24F 24 Cores

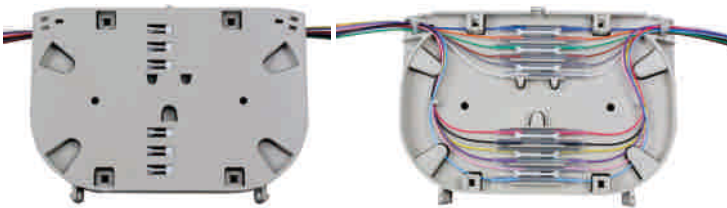

Dimensions and Capability

Dimensions (W*H*D)	170mm*110mm*10mm
Capacity	24 splices
Optional Accessories	Heat Shrink Tubes, Heat Shrink Splice Holder
Max diameter of entry cable	7.0mm
Weight	0.10 KG


ST-2S12A 12 Cores

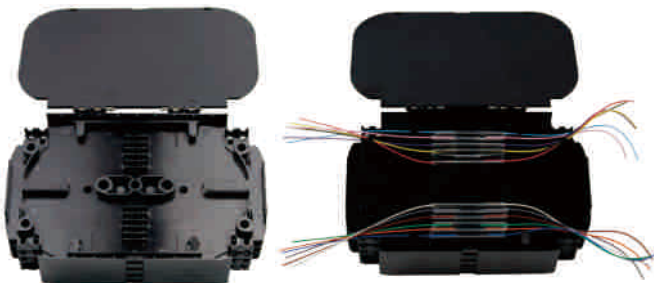

Dimensions and Capability

Dimensions (W*H*D)	160mm*107mm*12mm
Capacity	12 splices
Optional Accessories	Heat Shrink Tubes, Heat Shrink Splice Holder
Max diameter of entry cable	7.0mm
Weight	0.07KG


ST-2S12B 12 Cores

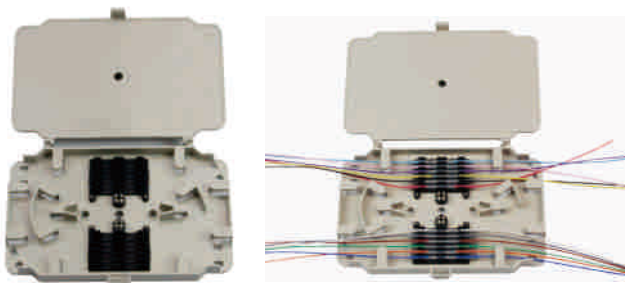

Dimensions and Capability

Dimensions (W*H*D)	140mm*95mm*13mm
Capacity	12 splices
Optional Accessories	Heat Shrink Tubes, Heat Shrink Splice Holder
Max diameter of entry cable	7.5mm
Weight	0.065 KG


ST-2S12C 12 Cores

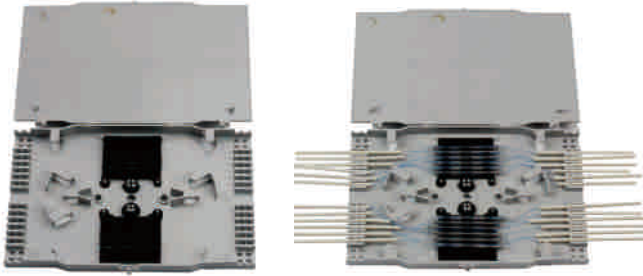

Dimensions and Capability

Dimensions (W*H*D)	157mm*103mm*14mm
Capacity	12 splices
Optional Accessories	Heat Shrink Tubes, Heat Shrink Splice Holder
Max diameter of entry cable	3.0mm
Weight	0.075 KG


ST-2T24A 24 Cores

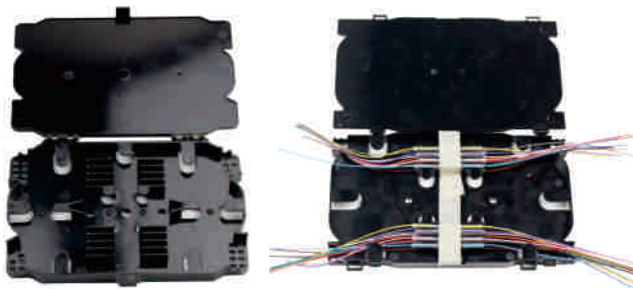

Dimensions and Capability

Dimensions (W*H*D)	140mm*95mm*15mm
Capacity	24 splices
Optional Accessories	Heat Shrink Tubes, Heat Shrink Splice Holder
Max diameter of entry cable	9.0mm
Weight	0.063 KG

ST-2T24B 24 Cores

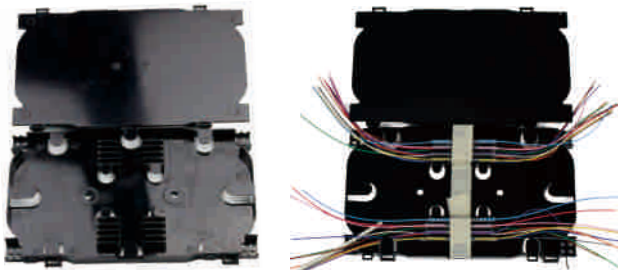

Dimensions and Capability

Dimensions (W*H*D)	170mm*105mm*15mm
Capacity	24 splices
Optional Accessories	Heat Shrink Tubes, Heat Shrink Splice Holder
Max diameter of entry cable	8.0mm
Weight	0.075 KG

ST-1Q48A 12 Cores



Dimensions and Capability

Dimensions (W*H*D)	89mm*42mm*15mm
Capacity	48 splices
Optional Accessories	Heat Shrink Tubes, Heat Shrink Splice Holder
Max diameter of entry cable	3.0mm
Weight	0.033 KG

Factory Overview



Metal Sheet Workshop



Fiber Optic Workshop



Welding Workshop



Laser Cutting



Painting Workshop



Assembly Workshop I



Assembly Workshop II



LONGXING

LONGXING

Add: 18 Anju Road, Beilun, Ningbo, 315800, China

Tel: +86 574 87917627 (English & Chinese)

Fax: +86 574 87908188

Postcode: 315800

Email: sales@lxtelecom.com

Website: www.lxtelecom.com

Ver. FNS170817



Recycled Paper

ATTENTION

Specifications published here are current as of the date of publication of this document. Because we are continuously improving our products, LongXing reserves the right to change specifications without prior notice. At any time, you may verify product specifications by contacting LongXing.