






Products & Services

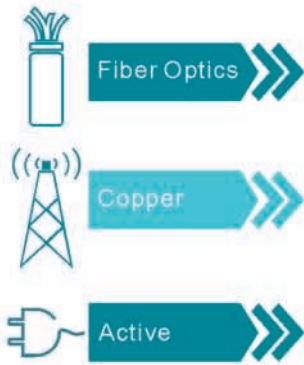

- ◆ Customised FTTx Solutions
- ◆ Optical Fiber Distribution Frames
- ◆ Patch Panels
- ◆ Distribution Boxes (Optical & Copper)
- ◆ Cross-Connect Cabinets (Optical & Copper)
- ◆ Outdoor Cabinets
- ◆ Network Rack Cabinets
- ◆ Optical Cable Splice Closures
- ◆ Optical Cable Tray / Raceway Systems
- ◆ Power Solutions (PDU & Heat Exchangers & Rectifier Modules & Switching Power Supply)
- ◆ Optical Splitters
- ◆ Optical Distribution Modules / Splice Tray
- ◆ Fiber Optic Adapters / Patch Cords / Pigtaills
- ◆ Optical Tools / Accessories
- ◆ Digital Distribution Frames
- ◆ Busbar Trunking System

Qualification



ISO 14001



ISO 9001



Quality Guarantee



Alibaba Assessment

History of LongXing



CONTENTS

FTTX	02
High Density ODF	04
Patch Panel	08
Outdoor Cabinet	18
Distribution Module	20
Plastic Distribution Box	21
Metal Distribution Box	23
Splice Tray	24
Accessories	25
Splice Closure	26
Enclosures	29
MTP / MPO	31
Patch Cords	33
Pigtails	34
Connectors	35
Adapters	36
Fast Connector	37
Splitter	39
Cable Tray	40
FTTH Accessories	42
Rectifier Module	43
Monitoring System	44
Power Supply	45
Power Distribution Units	46
Busbar Trunking System	47
Network Cabinet / Rack	48
Main Distribution Frame (MDF)	49
Digital Distribution Frame (DDF)	50

Integrated Outdoor Cabinet



P18

Optical Cable Splice Closure



P26

Optical Cable Tray



P40

High Density ODF



P04

Network Cabinet




P48

Optical Cross-Connection Cabinet




P19

Optical Cabinet

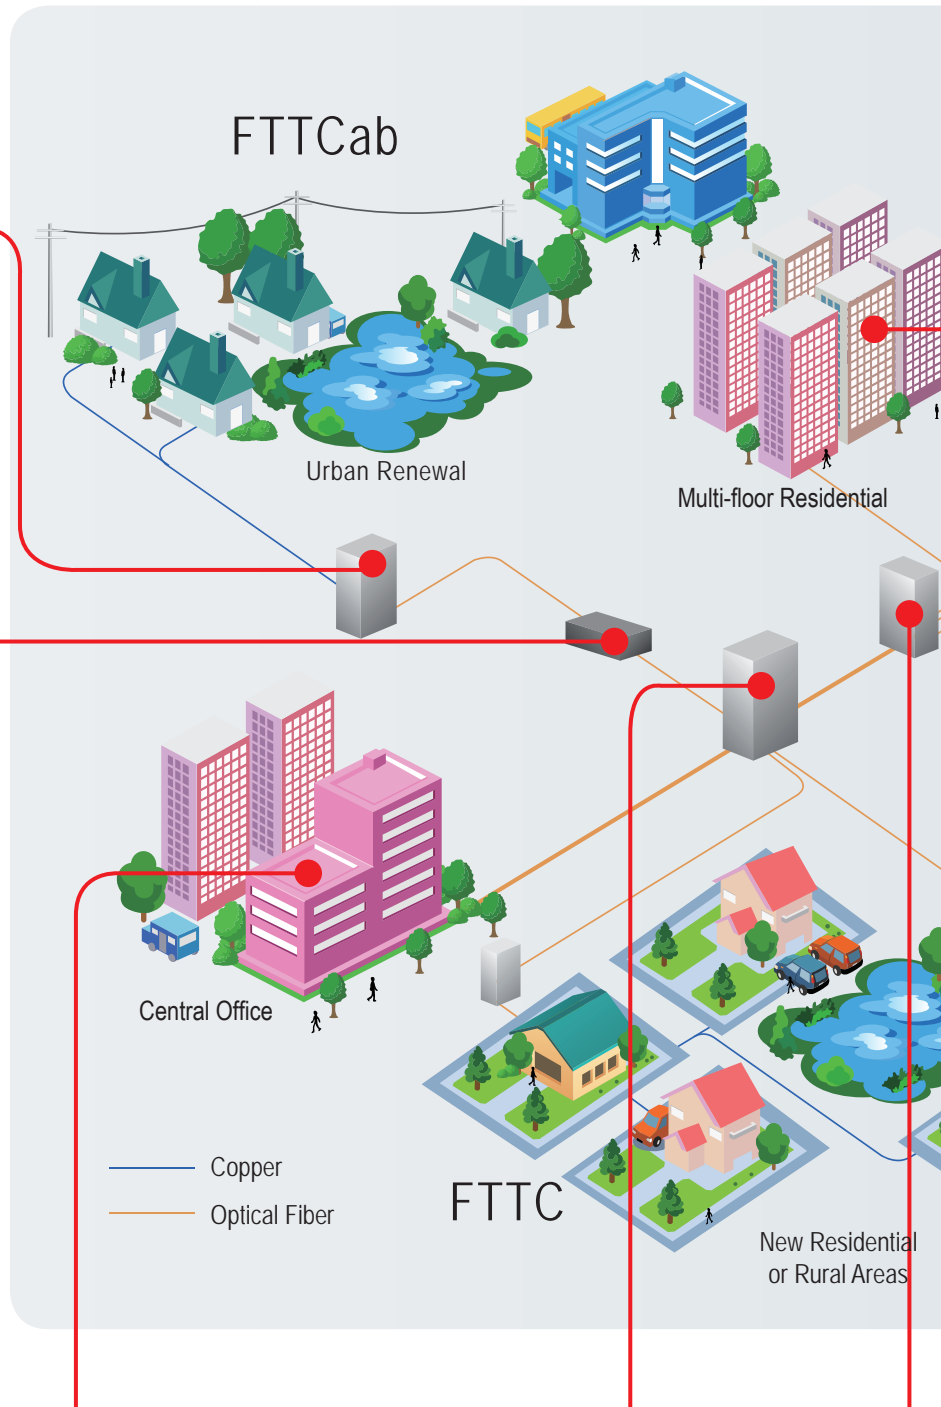

FTTX Solutions by LongXing

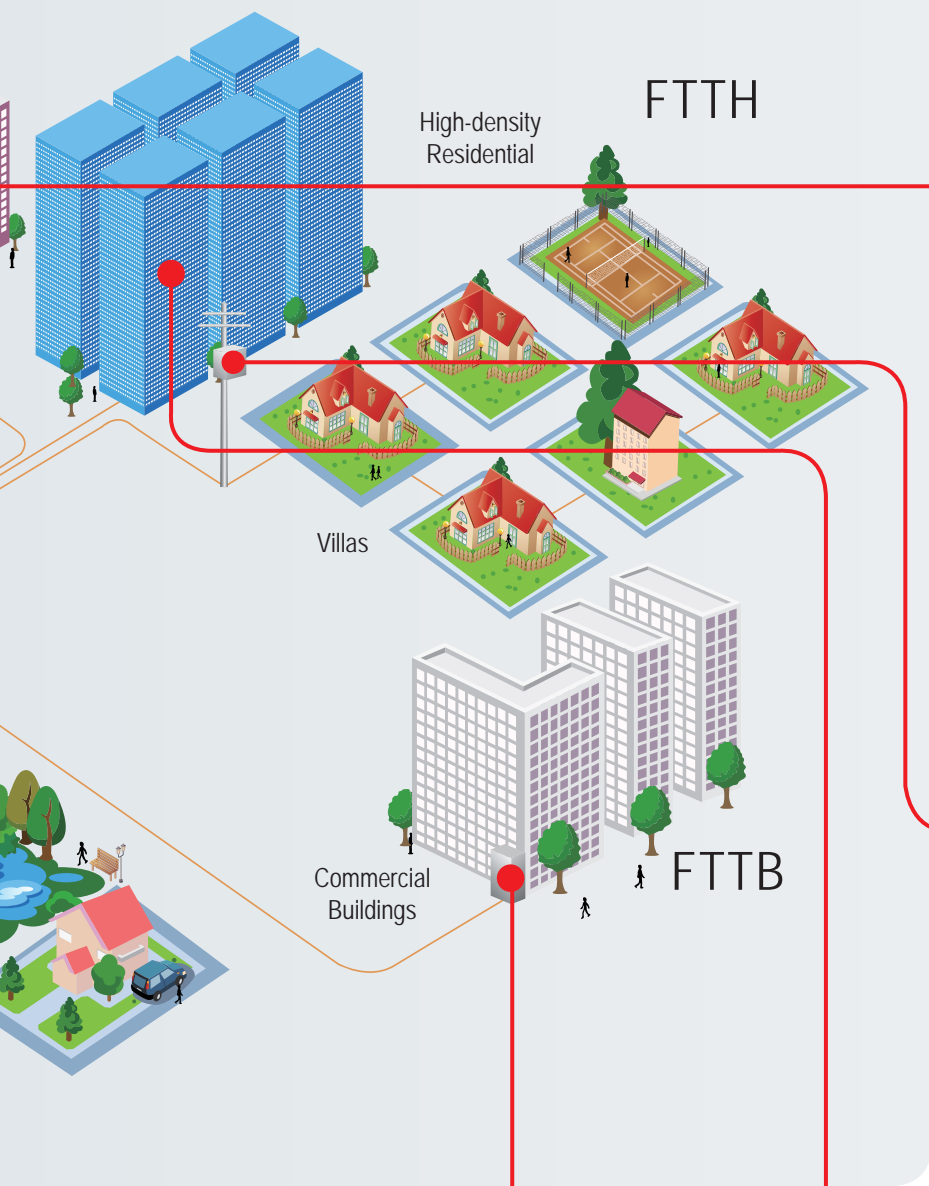


Optical Distribution Box



P23

Fiber Outlet



P21

Optical Termination Box



P21

Cross Connection net with Splitters




P19

Outdoor Splice Box




P23

ODF



P04

Optical Distribution Box with Splitters



P21

04

High Density ODF

- LongXing offers wide range of High Density Optical Fiber Distribution Frames which are ideal for using at the IDCs and the central offices.
- These ODFs are used to provide efficient cable connections between communication facilities. LongXing's ODFs integrate fiber splicing, storage, and cable connections together in a single unit.




» For more designs and details:

<http://www.lxtelecom.com/fiber-optics/optical-fiber-distribution-frames/hd-odf-gpx82-9.html>

Up to 4752 Cores!

**MAYBE THE
HIGHEST DENSITY
ODF IN THE WORLD**

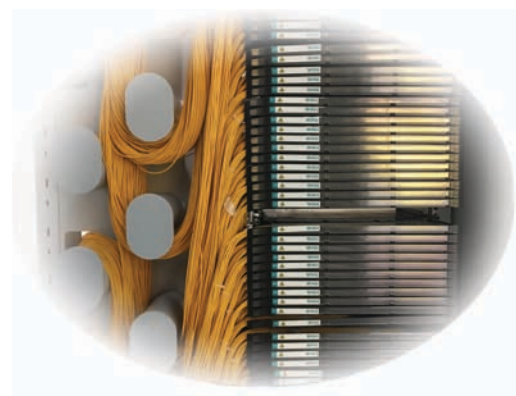

GPX82-9-1


Features

- Supports 4752 LC or 3168 SC ports per frame: Saves space through increased port density.
- Rear cable access only.
- Modular design: Enables one rack for many application spaces e.g. central office, headend, FTTx and data center.
- Increased patch cord routing space: Supports standard 1.6 and 2.0 mm patch cords.

GPX82-9-1	Dimensions(H*W*D)mm	Max Capacity(SC)	Max Capacity(LC)	Patch Panels with Regular Rail		
				Model	SC	LC
	2200*760*610	3168	4752	1U	72	108
2U				144	216	
3U				216	324	
4U				288	432	



➤ For more designs and details:
<http://www.lxtelecom.com/fiber-optics/optical-fiber-distribution-frames/hd-odf-gpx82-9-2.html>

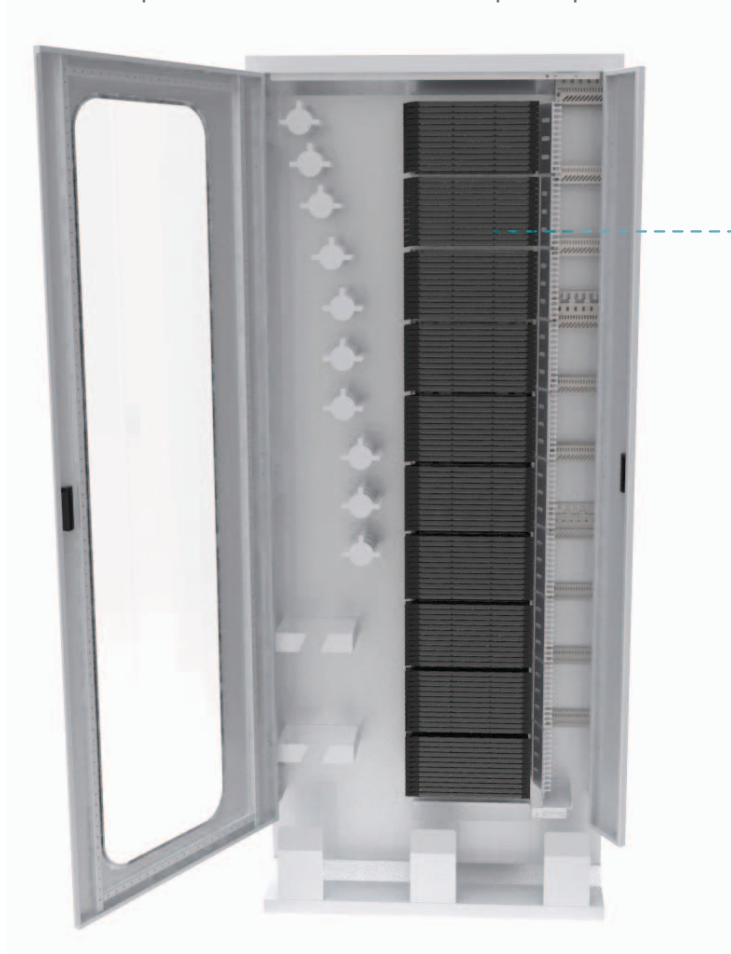

GPX82-9-2

Features

- Supports 4,320 LC or 2,880 SC ports per cabinet: Saves space through increased port density.
- Front cable access only.
- Allows for back-to-back frame configuration.
- Modular design: Enables one rack for many application spaces e.g. central office, headend, FTTx and data center.
- Increased patch cord routing space: Supports standard 1.6 and 2.0 mm patch cords.

GPX82-9-2	Dimensions(H*W*D)mm	Max Capacity(SC)	Max Capacity(LC)	Patch Panels with Regular Rail		
				Model	SC	LC
	2200*900*300	2880	4320	1U	72	108
2U				144	216	
3U				216	324	
4U				288	432	


06

High Density ODF



» For more designs and details:

<http://www.lxtelecom.com/fiber-optics/optical-fiber-distribution-frames/hd-odf-system-gpx82-10.html>

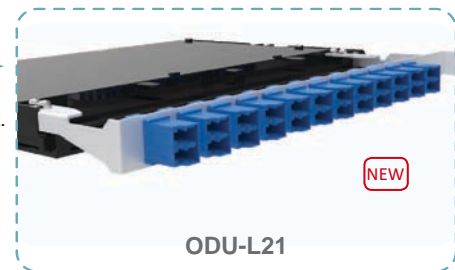

ODU-L21

GPX82-10

Features

- Standard 19" & ETSI installations.
- Designed to be used together with high density side access type patch panels.
- Maximum fiber density of 2016 ports (splice & patch) and superior cable management.
- Special cable glands to fix the maximum number of bundle cables on the ground.
- Slot type cable guide compartments to feed the modules via miniflex tubes.
- No crushed or stressed fibers.
- Wide range of splice, patch and cable storage options.
- Bend radius protection of 35 mm throughout entire frame and all modules.
- Max cable protection.
- Interchangeable cassettes for various cable/tube counts and connector styles.
- Accepts WDM and splitter cassettes.
- Integral patch cords management.

GPX82-9-2	Dimensions(H*W*D)mm	Max Capacity(SC)	Max Capacity(LC)	Patch Panels		
	2200*900*300	1008	2016	Model	SC	LC
				3U	72	144



➤ For more designs and details:
<http://www.lxtelecom.com/fiber-optics/optical-fiber-distribution-frames.html>




GPX82-2



GPX82-4



GPX82-1-2

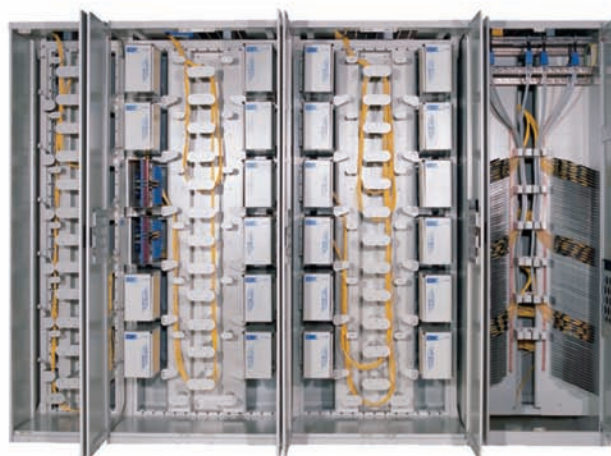

GPX82-6B

	Dimensions (H*W*D)mm	Panels	Max Capacity (FC)	Max Capacity (SC/LC)		Dimensions (H*W*D)mm	Panels	Capacity
GPX82-2	2600*840*300	12	864	1728	GPX82-1-2	2600*900*300	8	576
	2200*840*300	8	576	1152		2200*900*300	6	432
	2000*840*300	7	504	1008		2000*900*300	4	288
GPX82-4	2600*840*300	12	864	1728		2600*600*300	4	288
	2200*840*300	8	576	1152		2200*600*300	3	216
	2000*840*300	7	504	1008		2000*600*300	2	144

	Description	Dimensions(H*W*D)mm	Capacity	Remark
GPX82-6B	Fiber Storage Frame	2200*480*700		Disc-shape splice trays and 6-position adapter holders are adopted.
	Integrated Splice Frame	2200*720*700	12FO/tray, 144trays/frame	
	Basic Distribution Frame	2200*900*700	72FO/unit, 864FO(12units)/frame	
	Expansion Distribution Frame	2200*900*700	72FO/unit, 864FO(12units)/frame	

08

Patch Panel

- LongXing fiber optic patch panels provide a centralised point for termination, splice, storage and distribution of optical fibers.
- LongXing offers perfect solutions for the crucial elements of fiber cable management; connector and cable accessibility, bend radius protection, cable routing paths and physical protections through these patch panels.
- The patch panels are mountable on 19"-23" racks.




» For more designs and details:

<http://www.lxtelecom.com/fiber-optics/patch-panels.html>

ODU-L21

Features

- Compact 3U patch panel, accommodates 6 fiber trays.
- Max capacity of 24 fibers for each fiber tray.
- Max capacity of the patch panel is 144 fibers for LC Duplex adapters.
- Patch Panels are rear mounted for improved access.
- Fiber trays and connected patch cords can slide in and out independently as a pull-out unit.
- Easy side access ensures laser safety.
- Special splice module design, which allows splicing on one side and professional cable storage on the other side without cable congestion.
- Modules are tiltable up to 135 degree for ease of installation and maintenance.
- Special incoming cable fixing unit which ensures strong, easy and quick cable fixing for miniflex tubes-no need to use time consuming plastic cable ties.
- Integrated outgoing patch cords clamps and routing guides, which ensures min bend radius criteria of 35mm and professional cable management.

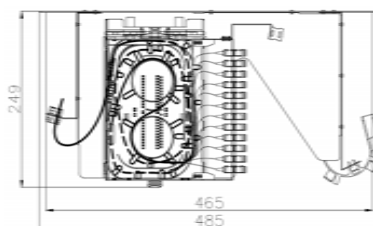


Model	Dimension(mm)			Capacity	
	Height	Depth	Width	SC	LC
ODU-L21	3U	258	19"/21"/23"	72	144

ODU-L11

Features

- Designed for a high-density fiber management system.
- Easy installation: 19", 21" and 23" rack mounting.
- Front rack mount brackets work with most network cabinets.
- Easy operations: using sliding rails to install the high density modules.
- Easy removable of modules.
- Multi-functions – Works with LongXing Series modules H1 (ultra high density).
- Protected patch panel offers secure environment for adapters, patch cords and pigtails.
- Adoptable adapter types: SC, LC.




Model	Dimension(mm)			Capacity		
				Module H1		Module Quantity
	Height	Depth	Width	Capacity		
SC				LC		
ODU-L11	1U(without cover)	280	19"/21"/23"	72	108	3
	2U	280	19"/21"/23"	144	216	6
	3U	280	19"/21"/23"	216	324	9
	4U	280	19"/21"/23"	288	432	12

» For more designs and details:
<http://www.lxtelecom.com/fiber-optics/patch-panels.html>

ODU-L10

Features

- Removable trays for easy upgrade (each tray can hold 12 adapters FC, SC, LC/Duplex).
- Tray have two different areas, one for splicing and the other for patching.
- Multiple configurations combining patching and splicing.
- External cable can be entered through two lateral (left and right) access – total front access for users.
- All fiber management accessories ensures a minimum curvature radius of 30mm.
- Multi-functions – Works with LongXing Series modules G (not just for splicing & terminating, also with options for splitters or fiber storage).
- Front door can be selected push button or key lock; allow easy access to the splicing and connectorization trays.
- Splice and connectorization tray allows entry and organization of patch cords up to 0.9mm in diameter.




Model	Dimension(mm)			Capacity	
	Height	Depth	Width	FC/SC/ST	LC duplex
ODU-L10	1U	280	19"/21"	24	48
	2U	280	19"/21"	48	96
	3U	280	19"/21"	72	144
	4U	280	19"/21"	96	192

ODU-L27

Features

- Loaded with OSP-M1 PLC Splitter.
- 4U Rack Mount to hold 4 pieces of 2*32 OSPM PLC Splitter.
- Customized design available upon request.
- Compact Design.
- Mount to standard EIA 19 " rack rails.
- Steel construction with Black Powder Coating.
- Ensure signal integrity, proper cable routing, bend radius control and cable protection.
- Provide higher patch field density in fewer rack units saving valuable space.
- Assures flexibility and ease of network deployment and moves, adds, and changes.
- Provides a complete system solution for connectivity.

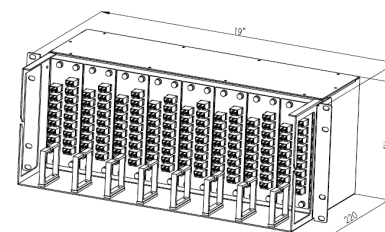

Model	Dimension(mm)			Capacity	Quantity of Splitters
	Height	Depth	Width		
ODU-L27	4U	220	19"	192 for LC	Qty.8,2*32
	4U	220	19"	96 for SC	Qty.4,2*32

10

Patch Panel


» For more designs and details:
<http://www.lxtelecom.com/fiber-optics/patch-panels.html>



ODU-L25

Features

- Top quality steel with cover by nonflammable electrostatic painted ensures a strong body, resistance to corrosive influences and pleasing appearance.
- Front and rear door have push buttons; allow easy access to the splicing trays.
- Easy operations: Sliding mechanism both forward and backward.
- Easy installations: 19" wall mounting.
- For standard 19" racks use (other rack width options available on request).
- Adoptable adapter types: SC simplex adapters and LC duplex adapters.

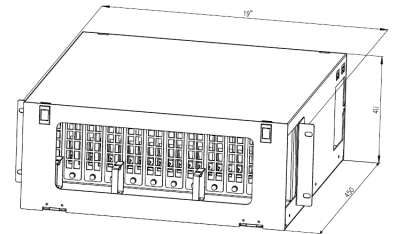


Model	Dimension(mm)			Capacity	
	Height	Depth	Width	FC/SC/ST	LC duplex
ODU-L25-1(Fiber to fiber)	4U	450	19"	144	288
ODU-L25-2(Drop cable to fiber)	4U	550	19"	144	288

ODU-L24

Features

- 1U (enables splitting up to 32 SC or 64 LC ports).
- Swing Out system with front cable management for patch cords.
- Manages small & large quantities of fiber with a high packing density.
- Compact Design.
- Mount to standard EIA 19 " rack rails.
- Steel construction with Black Powder Coating.
- Ensure signal integrity, proper cable routing, bend radius control and cable protection.
- Provide higher patch field density in fewer rack units saving valuable space.
- Assures flexibility and ease of network deployment and moves, adds, and changes.
- Provides a complete system solution for connectivity.
- 1:2, 1:4, 2:4, 1:8, 2:8, 1:16, 2:16, 1:32, 2:32, 1:64, 2:64 splitters of SC/LC connector types can be embedded inside.

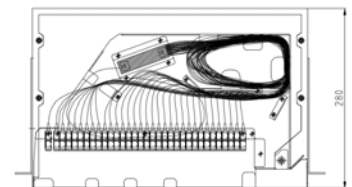

Model	Dimension(mm)			Capacity	Quantity of Splitters
	Height	Depth	Width		
ODU-L24	1U/44.5mm	280	19"	32 SC	Qty.1,1*32 / 2*32
	1U/44.5mm	280	19"	64 LC	Qty.1,1*64 / 2*64


» For more designs and details:

<http://www.lxtelecom.com/fiber-optics/patch-panels.html>

ODU-L23

Features

- Loaded with OSP-M1 PLC Splitter.
- 3U Rack Mount to hold 4 pieces of 2*32 OSPM PLC Splitter.
- Customized design available upon request.
- Compact Design.
- Mount to standard EIA 19 " rack rails.
- Steel construction with Black Powder Coating.
- Ensure signal integrity, proper cable routing, bend radius control and cable protection.
- Provide higher patch field density in fewer rack units saving valuable space.
- Assures flexibility and ease of network deployment and moves, adds, and changes.
- Provides a complete system solution for connectivity.

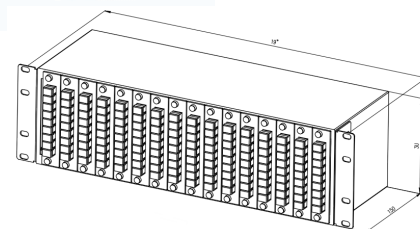


Model	Dimension(mm)			Capacity	Quantity of Splitters
	Height	Depth	Width		
ODU-L23	3U	150	19"	96	Qty.8,1*16
	3U	150	19"	96	Qty.4,2*32

ODU-L22

Features

- Loaded with OSPM PLC Splitter (LGX Box)
 - ◆ 1U Rack Mount to hold 3 pieces of 1*8 OSPM PLC Splitter (LGX Box).
 - ◆ 2U Rack Mount to hold 3 pieces of 1*16 OSPM PLC Splitter (LGX Box).
 - ◆ 3U Rack Mount to hold 12 pieces of 1*8 OSPM PLC Splitter (LGX Box).
- ◆ Customized design available upon request.
- Compact Design.
- Mount to standard EIA 19 " rack rails.
- Steel construction with Black Powder Coating.
- Ensure signal integrity, proper cable routing, bend radius control and cable protection.
- Provide higher patch field density in fewer rack units saving valuable space.
- Assures flexibility and ease of network deployment and moves, adds, and changes.
- Provides a complete system solution for connectivity.

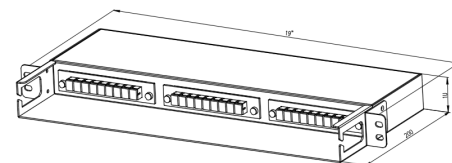


Model	Dimension(mm)			Capacity	Quantity of Splitters
	Height	Depth	Width		
ODU-L22	1U	200	19"	24	Qty.3,1*8
	2U	200	19"	48	Qty.3,1*18
	3U	200	19"	96	Qty.12,1*8

12

Patch Panel

➤ For more designs and details:
<http://www.lxtelecom.com/fiber-optics/patch-panels.html>

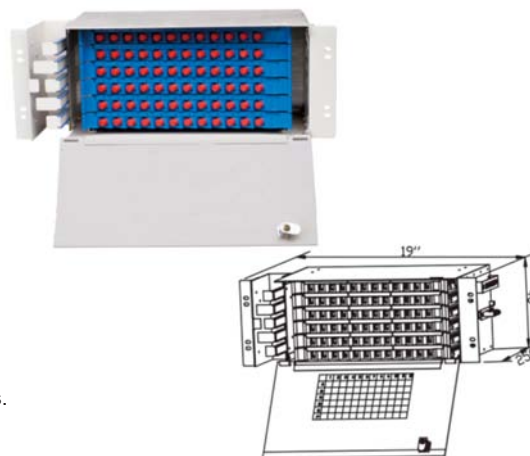

ODU-L1

Previous Model Number: GPX82-ZK2

Features


- Front rack mount brackets work most network cabinets.
- Removable front door with designation labels.
- Vertical cable guides on exit side allow for managed routing and protection of the fiber exiting the panel.
- Multi-functions - Works with all **LongXing Series A modules** (not just for splicing & terminating, also with options for fiber storage).
- Protected patch panel offers secure environment for adapters, patch cords and pigtails.
- Adoptable adapter types: FC, SC, ST simplex adapters and LC duplex adapters.

Model	Dimension(mm)			Capacity				
				Module A1			Module A3	
	Height	Depth	Width	Capacity		Module Capacity	Capacity	Module Capacity
				FC/SC/ST	LC duplex		FC/SC	
ODU-L1	2U	250	19"/21"/23"	24	48	2	48	2
	3U	250	19"/21"/23"	48	96	4	96	4
	4U	250	19"/21"/23"	72	144	6	144	6
	5U	250	19"/21"/23"	96	192	8	192	8

ODU-L2

Features

- Front rack mount brackets work with most network cabinets.
- Removable front door with designation labels.
- Integrated splicing, distribution with fiber storage.
- Vertical cable guides on exit side allow for managed routing and protection of the fiber exiting the panel.
- Multi-functions - Works with all **LongXing Series A modules** (not just for splicing & terminating, also with options for fiber storage).
- Protected patch panel offers secure environment for adapters, patch cords and pigtails.
- Adoptable adapter types: FC, SC, ST simplex adapters and LC duplex adapters.

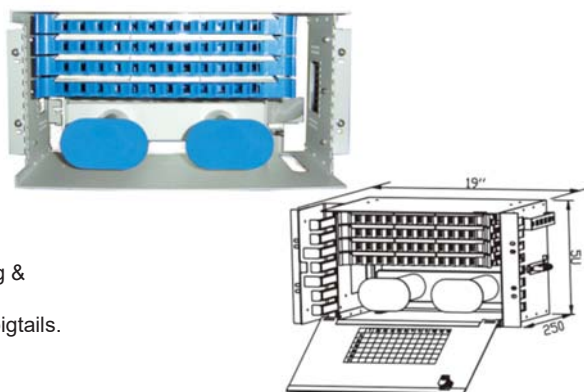


Model	Dimension(mm)			Capacity				
				Module A1			Module A3	
	Height	Depth	Width	Capacity		Module Capacity	Capacity	Module Capacity
				FC/SC/ST	LC duplex		FC/SC	
ODU-L2	4U	250	19"/21"/23"	12	24	1	24	1
				24	48	2	48	2
	5U	250	19"/21"/23"	36	72	3	72	3
				48	96	4	96	4

» For more designs and details:
<http://www.lxtelecom.com/fiber-optics/patch-panels.html>

ODU-L3

Features

- Front rack mount brackets work most network cabinets.
- Removable front door with designation labels.
- Function of fiber storage.
- Vertical cable guides on exit side allow for managed routing and protection of the fiber exiting the panel.
- Protected patch panel offers secure environment for fibers.

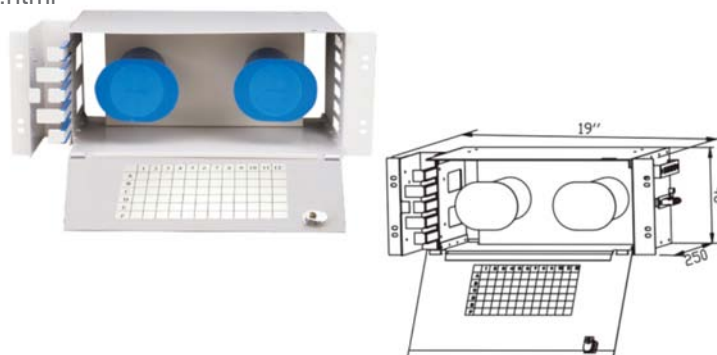


Model	Dimension(mm)			Capacity
	Height	Depth	Width	
ODU-L3	4U	250	19"/21"/23"	144

ODU-L4

Previous Model Number: GPX82-2-ODB2

Features

- Removable front door with designation labels.
- Multi-functions - Works with all **LongXing Series A modules** (not just for splicing & terminating, also with options for splitters or fiber storage).
- Protected patch panel offers secure environment for adapters, patch cords and pigtails.
- Adoptable adapter types: FC, SC, ST simplex adapters and LC duplex adapters.

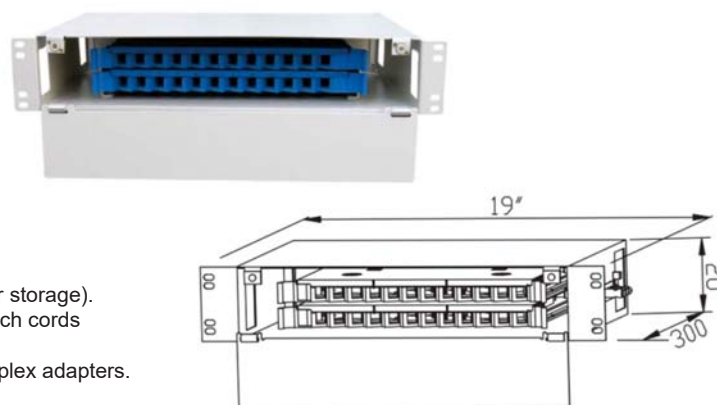

Model	Dimension(mm)			Capacity				
				Module A1			Module A3	
	Height	Depth	Width	Capacity		Module Capacity	Capacity	Module Capacity
				FC/SC/ST	LC duplex		FC/SC	
ODU-L4	1U	300	19"/21"/23"	12	24	1	24	1
	2U	300	19"/21"/23"	24	48	2	48	2
	3U	300	19"/21"/23"	36	72	3	72	3
				48	96	4	96	4
4U	300	19"/21"/23"	60	120	5	120	5	
			72	144	6	144	6	

*For more details of **Fiber Modules**, please visit: www.lxtelecom.com/products/fiber-modules/

14

Patch Panel


➤ For more designs and details:
<http://www.lxtelecom.com/fiber-optics/patch-panels.html>

ODU-L5

Previous Model Number: GPX82-RRM

Features

- For stand 19" racks use (other rack width options available on request).
- Easy operations: Rotate style.
- Cable can be entered on both left and right sides.
- Total front access for users.
- LongXing adapter panels are used for quick and easy adapter installations.
- Removable front door with designation labels.
- Protected patch panel offers secure environment for adapters, patch cords and pigtails.
- High Density, see the capacity chart below.
- Adaptable adapter types: FC, SC, ST simplex adapters and LC duplex adapters.

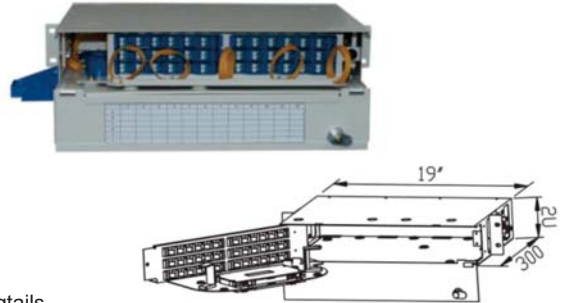


Model	Dimension(mm)			Capacity	
	Height	Depth	Width	FC/SC/ST	LC duplex
ODU-L5	1U	300	19"/21"/23"	12	24
				24	48
	2U	300	19"/21"/23"	36	72
				48	96
	3U	300	19"/21"/23"	60	120
				72	144
	4U	300	19"/21"/23"	84	168
				96	192

ODU-L6

Previous Model Number: GPX82-RRM2

Features

- Minimum bend radius controlled.
- Rotate Type, very easy installation and maintenances.
- Cable fixing units provided.

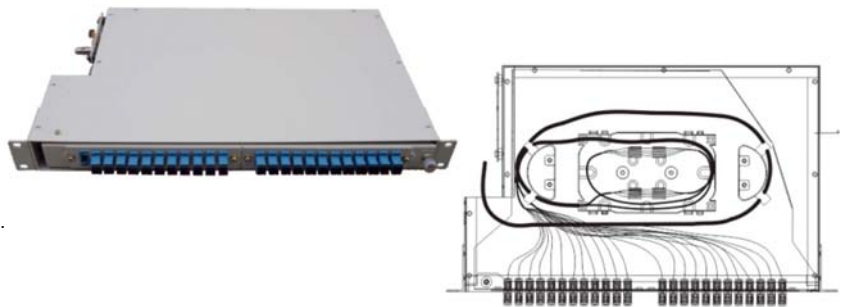

Model	Dimension(mm)			Capacity	
	Height	Depth	Width	FC/SC/ST	LC duplex
ODU-L6	1U	280	19"/21"/23"	24	48
	2U	280	19"/21"/23"	48	96


» For more designs and details:
<http://www.lxtelecom.com/fiber-optics/patch-panels.html>

ODU-L7

Previous Model Number: TGP-Y0904

Features

- Removable front-top cover for easier operations.
- Protected patch panel offers secure environment for adapters, patch cords and pigtails.
- Height: 1U-2U, depends on capacity and adapter type chosen.
- Adoptable adapter types: FC, SC, LC, ST, E2000.
- Adapter Panel adopted for easy operation.

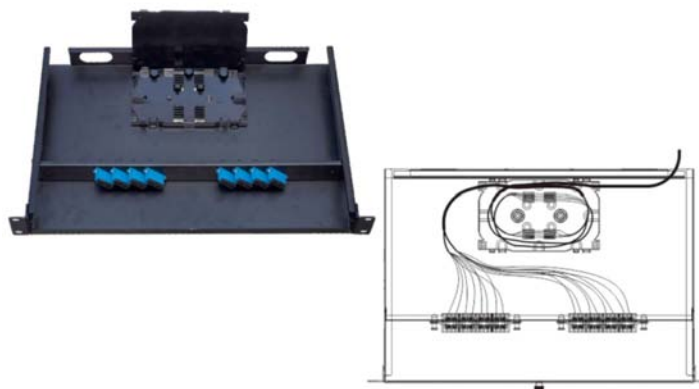

Model	Dimension(mm)			Capacity	
	Height	Depth	Width	FC/SC/ST	LC duplex
ODU-L7	1U	280	19"/21"/23"	16	16
				24	24
	2U	280	19"/21"/23"	32	32
				48	48

ODU-L8

Previous Model Number: TGP-Y0902

Features

- Easy operations: Drawer style.
- Cable inlet system provided on the rear side which has excellent performances for fixing outdoor cables.
- Fully stable patch panel, no risk of movement.
- Adoptable adapter types: FC, SC, LC.
- Options of Splice trays & fiber management guides.



Model	Dimension(mm)			Capacity	
	Height	Depth	Width	FC/SC/ST	LC duplex
ODU-L8	1U	300	19"/21"/23"	24	48
	2U	300	19"/21"/23"	48	96

16


Patch Panel

» For more designs and details:
<http://www.lxtelecom.com/fiber-optics/patch-panels.html>

ODU-L9

Features

- Easy installations: 19", 21" and 23" wall mounting.
- Easy operations: Drawer-type.
- Fully stable patch panel, no risk of movement.
- Protected patch panel offers secure environment for for adapters, patch cords and pigtails.
- Height: 1U, depends on capacity and adapter type chosen.
- Adoptable adapter types: FC, SC, ST and LC .
- Adapter Panel adopted for easy operation. Cable fixing units provided.
- Optional parts: splice trays, fiber management guides.

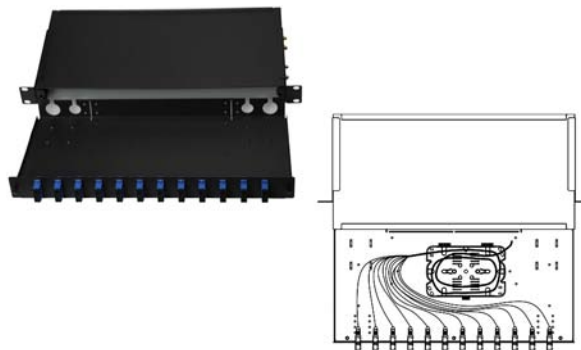


Model	Dimension(mm)			Capacity	
	Height	Depth	Width	FC/SC/ST	LC duplex
ODU-L9	1U	260	19"/21"/23"	48	60

ODU-L16

Features

- Top quality steel with electrostatic painted ensures the strong body and pleasing appearance.
- Easy installation: 19", 21" and 23" wall mounting.
- For standard 19", 21" and 23" racks use (other rack width options available on request).
- Front rack mount brackets work with most network cabinets.
- Easy operations: Drawer-type.
- Removable front door with designation labels.
- Vertical cable guides on exit side allow for managed routing and protection of the fiber exiting the panel.
- Multi-functions – Works with all LongXing Series A modules1 (not just for splicing & terminating, also with options for splitters or fiber storage).
- Protected patch panel offers secure environment for adapters, patch cords and pigtails.
- Adoptable adapter types: FC, SC, ST simplex adapters and LC duplex adapters.

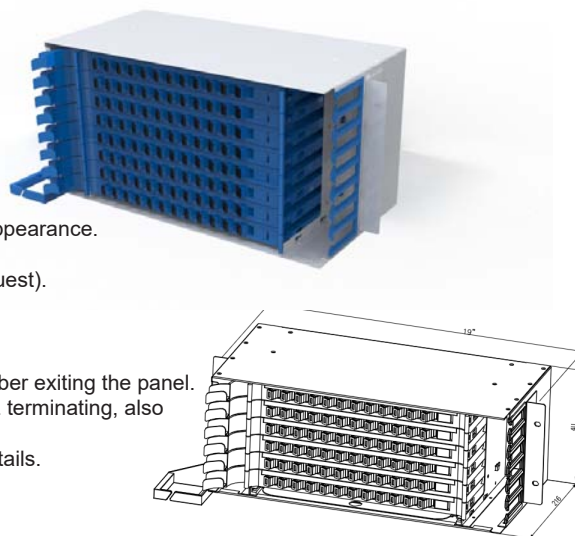



Model	Dimension(mm)			Capacity				
				Module A1		Module A3		
	Height	Depth	Width	Capacity		Module Capacity	Capacity	Module Capacity
				FC/SC/ST	LC duplex		FC/SC	
ODU-L16	2U	216	19"/21"/23"	24	48	2	48	2
	3U	216	19"/21"/23"	48	96	4	96	4
	4U	216	19"/21"/23"	72	144	6	144	6
	5U	216	19"/21"/23"	96	192	8	192	8

» For more designs and details:
<http://www.lxtelecom.com/fiber-optics/patch-panels.html>

ODU-L19

Features

- UP to 144Fiber LC Ports.
- Qty. 6 MTP/MPO Cassettes with 12/24 LC.
- Flexibility to Mix Adapter Plates with Cassettes in Patch Panel.
- Available in SM, OM1, OM2, OM3 and OM4 fiber grades.
- Flat Front Panel for Optimal Cable Routing.
- Removable Top for Easier Fiber Cable Management.
- Easily Accessible MPO/MTP Ports for Connection to Trunk Cable.
- Compliant IEC-61754-7, EIA/TIA-604-5 & RoHS.
- Factory terminated and tested.
- MPO/MTP components feature superior optical and mechanical properties.

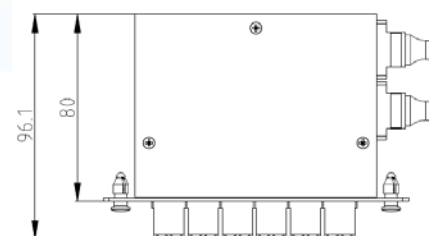
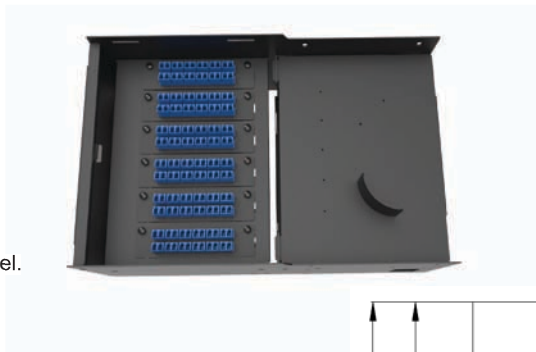


Model	Dimension(mm)			Max Capacity	Quantity of Cassette
	Height	Depth	Width		
ODU-L19	159mm	250mm	390mm	144	6

ODU-L20

Features

- Mounting:
 - ◆ 19-inch racks or cabinets.
 - ◆ Other mounting kits available.
- Fiber Chassis Data:
 - ◆ Fiber capacity: 72 FC/SC, or 144 LC.
 - ◆ Termination.
 - ◆ Pigtail storage.
- Hinged on left front side; allows full access to rear of front plate and interior of panel.
- 6 position adapter holders sold separately.
- Equipped with removable metal doors with Plexiglass windows.
- Designation labels included with each panel.
- Complete line of accessories including locks for security, cable clamp kits, bonding/grounding kits, ordered separately.

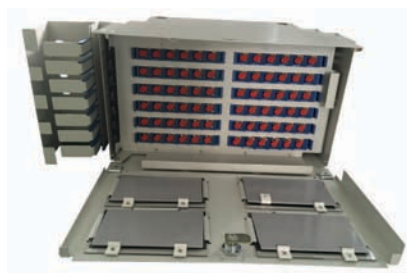

Model	Dimension(mm)			Capacity	
	Height	Depth	Width	FC/SC/ST	LC duplex
ODU-20	266.7mm / 6U	257.6mm	19"	96	192
	222.3mm / 5U	257.6mm	19"	72	144
	133.4mm / 3U	257.6mm	19"	48	96
	88.9mm / 2U	257.6mm	19"	24	48
	44.5mm / 1U	257.6mm	19"	12	24

18

Outdoor Cabinet

- Outdoor cabinets for fiber optics, copper cables, power cables and other telecom equipments.
- Glass-fiber or Steel cabinet with IP 65 protection.
- Customized designs available upon request.
- Shipped with interior accessories or the cabinet only.



➤ For more designs and details:
<http://www.lxtelecom.com/fiber-optics/outdoor-cabinets.html>



NEW

Other Options



Power. 110-240V. A pre-wired 20 Amp quad receptacle is usually a standard feature.



Power Supply (Breaker, Rectifier, Monitor)
 A system consists of Breaker, Rectifier and Monitor.



Ground bar kit. 10-position
 10 position isolated copper ground bar.



19" or 23" Mounting Panel. Standard fiber panel and MPO/MTP panel available.



PDU. Suitable for all kinds of 19" standard cabinets and nonstandard cabinets. Designed as modular structure.



Battery: AGM VRLA Batteries



Battery Storage. Normally designed to accommodate standard telecom style batteries.



Laptop Tray



L Rail Set



Interior Light



Heater



Fan



Air Conditioner



Heat Exchanger



Door Alarm



Water Alarm



Smoke Alarm



Dynamic Environment Monitoring Systems



Generator Plug & Interlock



Door Latch Tool. Extremely secure and impermeable.



Lifting brackets. Don't worry about loading your enclosure before installation. Crane install: Stainless steel lifting brackets on top.



Solar shield roof. The space between the double walled roof allows heat to dissipate reducing the effects of radiant heat.



Optical Splitter



Splice Tray



Distribution Module



19" or 23" Relay Racks. Adjustable rails for easy mounting.



Mounting Base



➤ For more designs and details:
<http://www.lxtelecom.com/fiber-optics/outdoor-cabinets.html>

Customized designs available upon your request.

Fiber Optic Cross-Connect Cabinet (Glass-fiber Cabinet)



GP31-2-A1

Fiber Optic Cross-Connect Cabine (Metal Cabinet)



GP31-2-B1



GP31-2-C1

Multi-functional Outdoor Cabinet (Suitable for Extreme Weather)



NPX06-H1d



20

Distribution Module

- LongXing optical distribution modules are designed for the purpose of optic fiber organization, storage and fiber optic fusion protection.
- Three types available: Splice & Distribution, Splice only, and Storage & Patching Module.
- Light and beautiful plastic structure.
- RoHS compliant.
- Ensuring minimum fiber bending radius.




➤ For more designs and details:

<http://www.lxtelecom.com/fiber-optics/distribution-modules.html>



Optical Splice & Distribution Module Series A (A0 A1 A2 A3 A4)

Capacity	A0/A1/A2		A3/A4	
	SC/FC/ST	LC	SC/FC	LC
	12	24	24	48



Optical Storage & Patching Module Series A (A5)

Capacity	A5	
	SC/FC/ST	LC
	12	24



Optical Splice Module Series A (A6)

Capacity	A6
	Max split ratio of 2×16



Optical Splice & Distribution Module Series B (B0)

Capacity	B0	
	SC/FC	LC
	12	24



Optical Splice Module Series (B3 B4)

Capacity	B3		B4	
	SC/FC	LC	SC/FC	LC
	18	34	34	66



Optical Splice & Distribution Module Series F (F1 F2)

Capacity	F1	F2
	12	SC/FC/LC 12



Optical Splice & Distribution Module Series G (G0)

Capacity	G0	
	SC	LC
	12	24



Optical Splice & Distribution Module Series H (H1)

Capacity	H1	
	SC	LC
	24	36



Optical Splice & Distribution Module Series I (I1)

Capacity	I1
	SC 12



- Termination box is suitable for terminating optical cables and jointing cable with pigtail and protecting fiber optic splices.
- LongXing offers hundreds of designs for different needs, including solutions for splitters, mechanical splicing in the FTTx networks.


21

Plastic Distribution Box

➤ For more designs and details:


<http://www.lxtelecom.com/fiber-optics/plastic-distribution-boxes.html>

GP31-1P02A



2 Cores Indoor
Size: 86mm*86mm*24mm

GP31-1P04A
(Pre GPZ01-124P)



4 Cores Indoor
Size: 152mm*112mm*30mm

GP31-1P04B



4 Cores Indoor
Size: 152mm*112mm*30mm

GP31-2P01A



1 Core Indoor&Outdoor
Size: 135mm*153mm*37mm

GP31-2P01B



1 Core Indoor&Outdoor
Size: 153mm*175mm*42mm

GP31-2P04A



4 Cores Indoor&Outdoor
Size: 102mm*167mm*31mm

GP31-2P08A



8 Cores Indoor&Outdoor
Size: 205mm*220mm*55mm

GP31-2P12A
(Pre GP31-2112P)



12 Cores Indoor&Outdoor
Size: 220mm*270mm*70mm

GP31-2P12B
(Pre GP31-2312P)



12 Cores Indoor&Outdoor
Size: 210mm*250mm*60mm

GP31-2P12C



12 Cores Indoor&Outdoor
Size: 194mm*228mm*58mm

GP31-2P16A



16 Cores Indoor&Outdoor
Size: 225mm*300mm*100mm

GP31-2P16B



16 Cores Indoor&Outdoor
Size: 219mm*293mm*84mm

GP31-2P16C



16 Cores Indoor&Outdoor
Size: 223.5mm*300mm*92mm

GP31-2P24A
(Pre GP31-2224)



24 Cores Indoor&Outdoor
Size: 300mm*380mm*100mm

GP31-2P24B



24 Cores Indoor&Outdoor
Size: 300mm*380mm*100mm

GP31-2P24C



24 Cores Indoor&Outdoor
Size: 260mm*330mm*130mm

GP31-2P24D



24 Cores Indoor&Outdoor
Size: 237mm*317mm*101mm

GP31-2P32B



32 Cores Indoor&Outdoor
Size: 350mm*400mm*110mm

GP31-1P02B



2 Cores Indoor
Size: 83.4mm*130mm*24.1mm

GP31-1P02C



2 Cores Indoor
Size: 79mm*122mm*24mm

22

Plastic Distribution Box



» For more designs and details:

<http://www.lxtelecom.com/fiber-optics/plastic-distribution-boxes.html>

GP31-1P06A



6 Cores Indoor
Size: 78mm*158mm*37mm

GP31-1P08A



8 Cores Indoor
Size: 118mm*158mm*32mm

GP31-1P08B



8 Cores Indoor
Size: 175mm*210mm*50mm

GP31-2P02A



2 Cores Indoor&Outdoor
Size: 120mm*172mm*31mm

GP31-2P04B



4 Cores Indoor&Outdoor
Size: 153mm*208mm*52mm

GP31-2P08B



8 Cores Indoor&Outdoor
Size: 195mm*240mm*66mm

GP31-2P08C



8 Cores Indoor&Outdoor
Size: 198mm*230mm*60mm

GP31-2P16D



16 Cores Indoor&Outdoor
Size: 240mm*306mm*106mm

GP31-2P16F



16 Cores Indoor&Outdoor
Size: 125mm*275mm*80mm

GP31-2P32A (Pre GP31-12W) **SMC**



32 Cores Indoor&Outdoor
Customized designs available upon request.

GP31-2P16E **SMC**



16 Cores Indoor&Outdoor
Size: 350mm*426mm*120mm

GP31-2P32C **SMC**



32 Cores Indoor&Outdoor
Size: 350mm*420mm*170mm

SMC

Made of Glass-fiber Polyester.



● Customized designs available upon request.

➤ For more designs and details:

<http://www.lxtelecom.com/fiber-optics/metal-distribution-boxes.html>

GP31-1M48A (Pre GP31-1)
Indoor



Typical Capacity: 96 cores

GP31-2M32A
Indoor&Outdoor



Typical Capacity: 32 cores

GP31-2M64A (Pre GP31-12N)
Indoor&Outdoor



Typical Capacity: 64 cores

GP31-2M96A (Pre GP31-2-A1X-2)
Indoor&Outdoor



Typical Capacity: 96 cores

GP31-2M96B (Pre GP31-1)
Indoor&Outdoor



Typical Capacity: 192 cores

GP31-2M96C (Pre GP31-1-12)
Indoor&Outdoor



Typical Capacity: 96 cores

GP31-1M08A
Indoor



Typical Capacity: 8 cores

GP31-1M32A
Indoor



Typical Capacity: 32 cores

GP31-2M144A
Indoor&Outdoor



Typical Capacity: 144 cores

GP31-1M12A
Indoor




Typical Capacity: 12 cores

GP31-1M48B
Indoor



Typical Capacity: 48 cores

GP31-2M48A
Indoor&Outdoor



Typical Capacity: 48 cores

AL
.5025 Made of Aluminum.

24

Splice Tray

● LongXing ST series splice tray is used in optical distribution frame, distribution box, and splice closures, which is engineered for use with indoor or outdoor splice hardware with both loose tube and tight-buffered optical cable designs.




» For more designs and details:
<http://www.lxtelecom.com/fiber-optics/splice-tray.html>

ST-1D08A



8 Splices
 Size: 95mm*85mm*14mm

ST-1D12A



12 Splices
 Size: 160mm*100mm*17mm

ST-1D24A



24 Splices
 Size: 210mm*156mm*18mm

ST-1D24B



24 Splices
 Size: Φ 212mm, δ 16mm

ST-1D24C




24 Splices
 Size: Φ 170mm, δ 10mm
 Φ 220mm, δ 14mm

ST-2D12A



12 Splices
 Size: 160mm*107mm*10mm

ST-2D12B



12 Splices
 Size: 170mm*105mm*11mm

ST-2D24A



24 Splices
 Size: 224mm*114mm*17mm

ST-2D24B



24 Splices
 Size: 223mm*110mm*14mm

ST-2D24C



24 Splices
 Size: 157mm*105mm*15mm

ST-2D24D



24 Splices
 Size: 160mm*100mm*15mm

ST-2D24E



24 Splices
 Size: 180mm*110mm*120mm

ST-2D24F




24 Splices
 Size: 170mm*110mm*10mm

ST-2S12A



12 Splices
 Size: 160mm*107mm*12mm

ST-2S12B



12 Splices
 Size: 140mm*95mm*13mm

ST-2S12C




12 Splices
 Size: 157mm*103mm*14mm

ST-2T24A



24 Splices
 Size: 140mm*95mm*15mm

ST-2T24B



24 Splices
 Size: 170mm*105mm*15mm

ST-1Q48A




48 Splices
 Size: 42mm*89mm*15mm



- Fiber slack storage units are devices used to coil up and store additional length of fiber optic cable. This secures the cable while eliminating slack. The fiber slack storage device can be mounted aerially, on a wall, or inside a vault. Primus Cable supplies half round spools, plastic Sno-Shoes, and cable management round spools to organize fiber.

➤ For more designs and details:
<http://www.lxtelecom.com/fiber-optics/accessories/fiber-management-spool.html>

Cable Management Spools

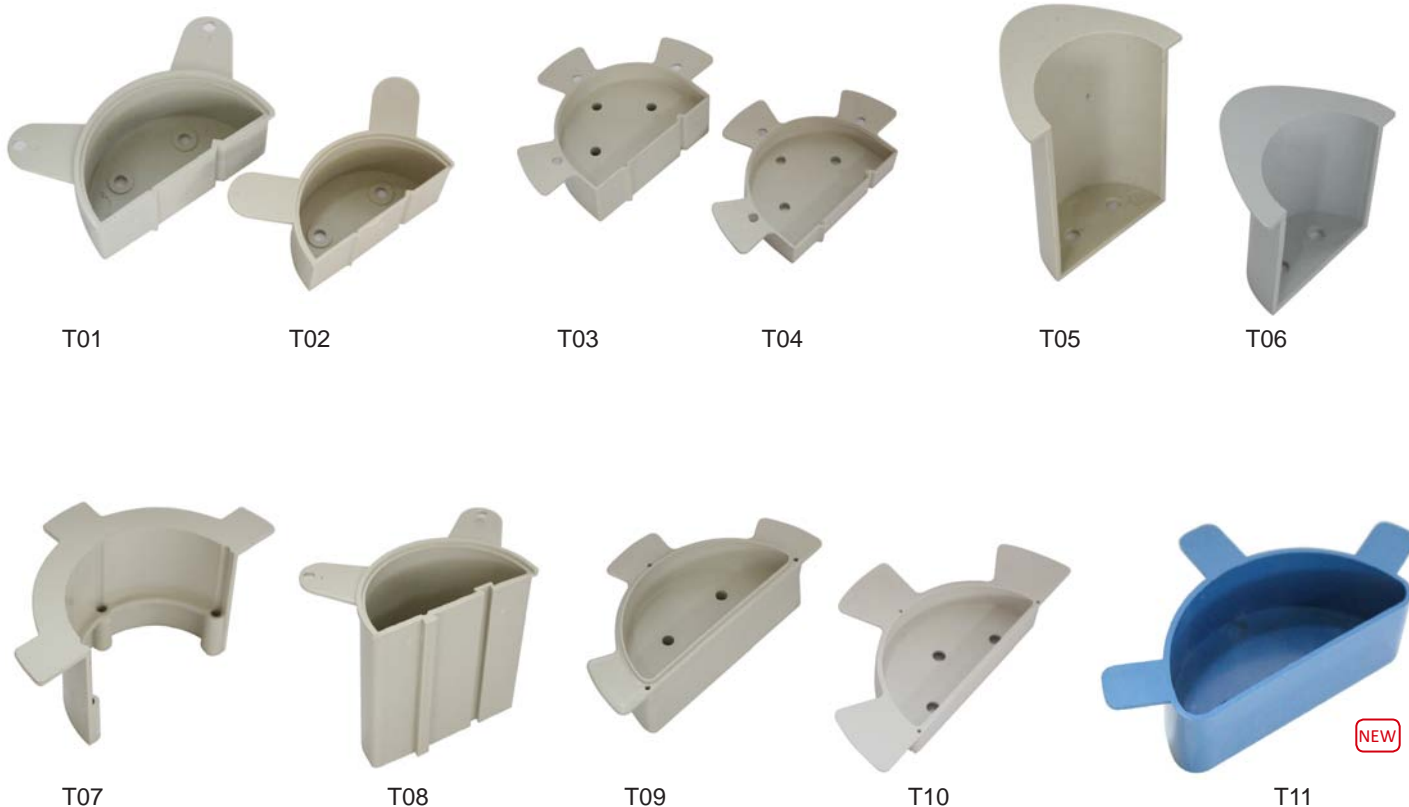

Part Number	Height	Dimensions			
		Inner Width	Maximum Width	Inner Depth	Maximum Depth
T01	28	80	80	40	50
T02	26	65	65	32	42
T03	15	80	118	54	74
T04	30	80	120	55	75
T05	65	54	54	20	35
T06	45	55	55	20	37
T07	55	70	110	35	57
T08	80	80	80	40	50
T09	29	80	105	38	53
T10	14	78	120	38	60
T11	23	68	68	30	40

26

Splice Closure



» For more designs and details:

<http://www.lxtelecom.com/fiber-optics/splice-closures/aerial-fosc-gpj83-12.html>

GPJ83-12



Overview

LongXing GPJ83-12 fiber optic splice closures (FOSC) are used to distribute, splice, and store the outdoor optical cables which enter and exit from the ends of the closure. There are two connection ways: direct connection and splitting connection. Suitable for different ways of cable's divergent and splicing, including uncut cable.



Features

- Sealing style: Box use mechanical seal style.
- Installation style: Aerial.
- Box Material: Modified Polymer Plastic.
- Seal Material: Vulcanized Silicone Rubber.
- The protection grade reaches IP 65.
- Installation Method: Aerial or Hang on the entrance cable directly.
- Two-layer system, bottom layer for splicing, top layer for splitting & distribution.
- Structured construction fixed by simple buckle, easy for operation.
- Ambient temperature ranges from -40 to 65°C .
- The closure is of small volume, big capacity and convenient maintenance.
- The closure casing is made of quality engineering plastics, and of good performance of anti-erosion against acid and alkali salt, anti-aging, as well as smooth appearance and reliable mechanical structure.
- The mechanical structure is reliable and has the performance of resisting wild environment and intensive climate changes and serious working environment.


Dimensions and Capability	
Dimensions (L*W*H)	605mm*167mm*87mm
Quantity of Fiber	4 in, 16 out
Adapter Type	SC, LC
Max Cable Diameter	16mm
Max Ratio	(1*8)*2
Max Capacity	24



➤ For more designs and details:

<http://www.lxtelecom.com/fiber-optics/splice-closures/inline-fosc-gpj83-11.html>

GPJ83-11 series

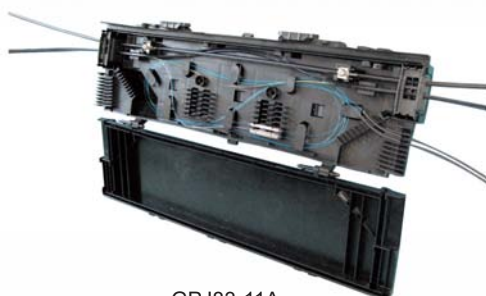

GPJ83-11A
Splice type



GPJ83-11B
Splitter module type


Overview

LongXing GPJ83-11 series Aerial Weather-tight Splice Closures are designed for aerial strand-mount FTTH drop locations where drop cables are spliced to distribution cables. These free breathing closures combine grommet cable sealing technology and splice tray, the splitter module is also available. Aerial Weather-tight Splice Closures are suitable for special feature with SSW cable. These durable, easy to install closures will increase productivity, reduce labor expenses and last through the life time of your network.

Features

- Chemical and mechanical resistance for all the aerial application areas in the fiber networks.
- Cover most of the applications in the premise wiring networks like Fiber To The Home (FTTH).
- Closure adopts hinge/buckle mechanism which makes dismantling/assembly easy.
- Cable entry section can accommodate 1 main cable with up to 16c SSW cable.
- Can accommodate up to 8 drop cables.
- Convenient attachable splitter module with 1:8 splitter module & 1:4 splitter module for drop cable installation.
- Re-useable grommet sealing open and close easily for adding or removing drop cables providing efficient cable installation with no mess.

Applications

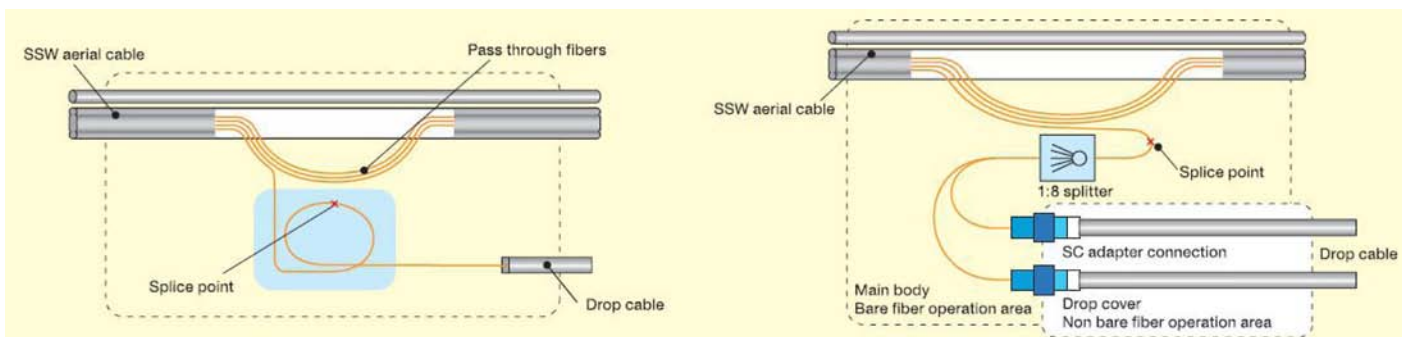

Dimensions and Capability

Dimensions (L*W*H)	400mm*60mm*130mm (Splitter module type GPJ83-11A)	
Material	Molded plastic	
Cable Diameter	Main cable	SSW aerial optical cable: 1 PC
	Drop cable	2×3 mm: up to 8 PCS
Cable Ports	2 for main cable	
Maximum Fiber Storage Capacity	Single-fiber	12 splices points
No. of Optical Adapter	Max. 8×SC adapter	with 1×8 splitter module

28

Splice Closure


- LongXing GPJ83 series fiber optic splice closures, made of quality engineering plastics, are designed to simplify splice management.
- No heat, adhesives, drills or powered equipment for installation or re-entry are required.
- They are applicable to man-holes, tunnels and aerial, etc.
- Protection level reaches IP66.



➤ For more designs and details:
<http://www.lxtelecom.com/fiber-optics/splice-closures.html>

Dome Style

GPJ83-3



Size: 480(H)*Φ150 4 Ports
 Capacity: Loose fiber: 72 Ribbon fiber: 320

GPJ83-5



Size: 650(H)*Φ235 6 Ports+1 Oval Port
 Capacity: Loose fiber: 192 Ribbon fiber: 560

GPJ83-6



Size: 500(H)*Φ171 6 Ports
 Capacity: Loose fiber: 96 Ribbon fiber: 480

GPJ83-9B



Size: 500(H)*Φ171 4 Ports
 Capacity: Loose fiber: 72 Ribbon fiber: 320

GPJ83-10



Size: 275(H)*Φ148 4 Ports
 Capacity: Loose fiber: 12

Horizontal Style

GPJ83-1




Size: 420*145*145 4 Ports
 Capacity: Loose fiber: 96 Ribbon fiber: 480

GPJ83-2



Size: 460*260*145 6 Ports
 Capacity: Loose fiber: 144 Ribbon fiber: 480

GPJ83-4



Size: 660*220*178 6 Ports
 Capacity: Loose fiber: 192 Ribbon fiber: 480

GPJ83-7



Size: 450*200*125 4 Ports
 Capacity: Loose fiber: 96 Ribbon fiber: 320

GPJ83-8



Size: 392*152*54 4 Ports
 Capacity: Loose fiber: 24 Ribbon fiber: 144



- LongXing fiber splice closure GPJ83 Series is a complete line of re-enterable fiber optic splice closures and trays used for housing, organizing and protecting single or ribbon fiber cables and splices.

➤ For more designs and details:
<http://www.lxtelecom.com/fiber-optics/enclosures.html>

GPJ83-H01 **NEW**



Size: 390*210*120 **6 Ports**
 Capacity: **Bundle:** 12 cores-96 cores
Ribbon: 72 cores-144 cores

GPJ83-H02



Size: 390*210*85 **6 Ports**
 Capacity: **Bundle:** 12 cores-96 cores
Ribbon: up to 144 cores

GPJ83-H03 **NEW**



Size: 280*200*90 **4 Ports**
 Capacity: **Bundle:** 12 cores-96 cores
Ribbon: up to 144 cores

GPJ83-H04



Size: 450*220*110 **6 Ports**
 Capacity: **Bundle:** 12 cores-96 cores
Ribbon: 72 cores-288 cores

GPJ83-H05



Size: 450*220*160 **6 Ports**
 Capacity: **Bundle:** 12 cores-192 cores
Ribbon: 72 cores-288 cores

GPJ83-H06



Size: 395*195*130 **6 Ports**
 Capacity: **Bundle:** 12 cores-96 cores
Ribbon: 72 cores-144 cores

GPJ83-H07



Size: 470*180*125 **6 Ports**
 Capacity: **Bundle:** 12 cores-96 cores
Ribbon: up to 144 cores

GPJ83-H08



Size: 340*150*70 **4 Ports**
 Capacity: **Bundle:** 12 cores-48 cores
Ribbon: 36 cores-72 cores

GPJ83-H09



Size: 605*215*120 **4 Ports**
 Capacity: **Bundle:** 48 cores-144 cores
Ribbon: max. 576 cores

GPJ83-H10



Size: 450*220*110 **8 Ports**
 Capacity: **Bundle:** 12 cores-96 cores
Ribbon: max. 144 cores

GPJ83-H11



Size: 413*160*88 **4 Ports**
 Capacity: **Bundle:** 12 cores-96 cores
Ribbon: max. 144 cores

GPJ83-H12



Size: 605*215*175 **4 Ports**
 Capacity: **Bundle:** 48 cores-288 cores
Ribbon: max. 1152 cores

GPJ83-H13



Size: 460*182*120 **4 Ports**
 Capacity: **Bundle:** 12 cores-96 cores
Ribbon: up to 144 cores

GPJ83-H14



Size: 336*180*100 **8 Ports**
 Capacity: **Bundle:** 12 cores-48 cores
Ribbon: 36 cores-72 cores


30

Enclosures



➤ For more designs and details:
<http://www.lxtelecom.com/fiber-optics/splice-closures.html>

GPJ83-D01



Size: 430*190 **4 Ports**
Capacity: Bundle: 12 cores-96 cores
Ribbon: up to 288 cores

GPJ83-D02



Size: 540*205 **5 Ports**
Capacity: Bundle: 24 cores-96 cores
Ribbon: up to 288 cores

GPJ83-D03 **NEW**



Size: 420*190 **5 Ports**
Capacity: Bundle: 12 cores-96 cores
Ribbon: up to 144 cores

GPJ83-D04



Size: 480*220 **6 Ports**
Capacity: Bundle: 12 cores-288 cores
Ribbon: up to 432 cores

GPJ83-D05



Size: 310*190 **4 Ports**
Capacity: Bundle: 12 cores-48 cores
Ribbon: up to 72 cores

GPJ83-D06



Size: 460*190 **4 Ports**
Capacity: Bundle: 12 cores-96 cores
Ribbon: up to 144 cores

GPJ83-D07 **NEW**



Size: 310*190 **4 Ports**
Capacity: Bundle: 12 cores-48 cores

GPJ83-D08



Size: 460*205 **5 Ports**
Capacity: Bundle: 24 cores-96 cores
Ribbon: up to 288 cores

GPJ83-D09



Size: 470*210 **9 Ports**
Capacity: Bundle: 24 cores-144 cores
Ribbon: up to 432 cores

GPJ83-D10



Size: 470*210 **5 Ports**
Capacity: Bundle: 24 cores-144 cores
Ribbon: up to 432 cores

GPJ83-D11



Size: 515*310 **7 Ports**
Capacity: Bundle: 24 cores-288 cores
Ribbon: up to 864 cores

GPJ83-D12



Size: 395*190 **4 Ports**
Capacity: Bundle: 6 cores-96 cores
Ribbon: up to 144 cores

GPJ83-D13



Size: 490*220 **6 Ports**
Capacity: Bundle: 48 cores-288 cores
Ribbon: up to 864 cores

GPJ83-D14



Size: 435*190 **5 Ports**
Capacity: Bundle: 12 cores-96 cores
Ribbon: up to 288 cores



➤ For more designs and details:
<http://www.lxtelecom.com/fiber-optics/patch-cords/mpo-mtp-patch-cable.html>



J-MP- [- - - - - - - - - - - - - - - - - -] /

Fiber Count	
04	4 cord
08	8 cord
12	12 cord
24	24 cord

Wire Map Configuration	
A	Type A
B	Type B
C	Type C

Fiber Type	
A	Singlemode fiber
I	Singlemode G655 fiber
C	50/125μm
D	62.5/125μm
F	50/125μm OM2
K	62.5/125μm OM2
G	50/125μm OM3
H	OM4

Ribbon Cable Type	
B0	Bare fiber
R0	Round cord
V0	Oval cord, flat

Cable Type (Fan-out Section)	
C	Coated fiber(250μm)
L	0.9mm loose tube cable
O	2.0mm PVC cable
Q	3.0mm PVC cable
F	LSZH cable 2.0mm
I	LSZH cable 3.0mm
N	No fanout
X	Others, please specify*

Connector Type (MPO/Fanout or MPO)	
M0	Male type, flat polish, MPO
M8	Male type, 8°APC angled, MPO
F0	Female type, flat polish, MPO
F8	Female type, 8°APC angled, MPO
SC	SC type
AS	SC/APC type
FC	FC type
AP	FC/APC type
LC	LC type
AL	LC/APC type
MU	MU type
NC	None
XX	Others, please specify*

Fan Out Cable Length	
X30	30 cm
X50	50 cm
001	1 m
000	No fanout
XXX	Others*

Configuration	
SG	Pigtail
DB	Patch cord

Fiber Length (Include Fanout Length)	
0001	1m
0002	2m
0010	10m
0015	15m
X050	50cm
XXXX	Others, please specify*

Ordering Example:

J-MP-12-A-GR0N-0003-DB-000-F0/F0 MPO, 12 cord, Type A, 50/125μm OM3, Round cord, No fanout, 3 m, Patch cord, No fanout, Female type, flat polish, MPO/ Female type, flat polish, MPO.

Note:*If the required type of any item is not on the relevant list, please use "X", "XX", "XXX" or "XXXX" as the red cells indicate, and kindly state the required type in the description of PO.


32

MTP / MPO




For more designs and details:
<http://www.lxtelecom.com/uploadfile/down/catalog/longxing-mtp-mpo-solutions.pdf>

ULTRA DENSITY

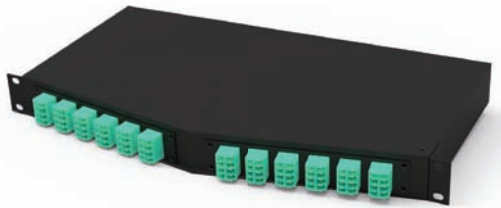

Most densely populated patch panels

- 1U Angled or 1U Flat
- Up to 144 fiber in 1U, LC to MTP / MPO
- Factory configured for rapid deployment
- Single-mode or multimode (OM3/OM4)



MTP / MPO HARNESSES

- Pre-terminated MTP / MPO-LC or MTP / MPO-SC
- 12 or 24 pin MPO connectors
- Connect directly to equipments



MTP / MPO TRUNK CABLES

- Pre-terminated 40G/100G backbone
- 12 or 24 pin MPO connectors
- MTP / MPO cassette to cassette connections

HIGH DENSITY



Modular patch panels fully loaded with MTP / MPO cassettes


- 1U or 3U (max 4 MTP / MPO cassettes per 1U)
- Up to 96 fiber in 1U, LC to MTP / MPO
- Work with MPO Cassettes
- Factory configured or build your own



MTP / MPO CASSETTES

- Up to 4 cassettes in 1U
- 12, 24, or 36 fiber per cassette
- Easy installation/replacement

HIGH DENSITY

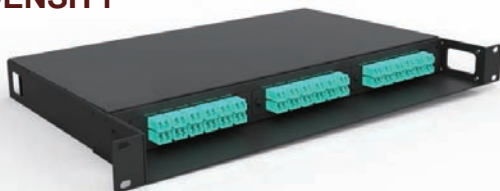

Modular patch panels fully loaded with adapter plates

- 1U (max 4 adapter plates per 1U)
- Up to 108 fiber in 1U, LC to MTP / MPO
- Work with Adapter Plates
- Factory configured or build your own



ADAPTER PLATES

- Up to 4 cassettes in 1U
- 12, 24, or 36 fiber per cassette
- Pigtail/Splice tray sets available

Accessories



MTP / MPO Adapter

- Type A (opposed) or type B (aligned), Full Flange
- Free-hanging or panel-mount design
- High Performance, Premium Quality
- High-strength casing materials



* Customized pre-terminated high density solutions available upon request.



- LongXing produces a wide variety of fiber cable assemblies and accessories designed to meet the specific application needs of our customers, which range from patch cords, multi-fiber assemblies and connectors to adapters.

33

Patch Cords

» For more designs and details:
<http://www.lxtelecom.com/fiber-optics/patch-cords.html>



Patch Cord Catalog Number

T S S Y X FC A SC A 2

Fiber Type		
S	G652D	Single Mode
D	G655	
K	G656	
P	G657A1	
L	G657A2	
B	OM1(62.5/125µm)	Multi Mode
G	OM1(50/125µm)	
Q	OM2(50/125µm)	
W	OM3(50/125µm)	
Y	OM4(50/125µm)	
O	Other *	

Cable Type	
S	Simplex
D	Duplex
F	4 cores
E	8 cores
T	12 cores
O	Other *

Cable Colour	
Y	Yellow
B	Blue
W	White
O	Orange
G	Green
Z	Brown
S	Slate
R	Red
H	Black
P	Purple
F	Rose
A	Aqua

Assembly Length	
1-20	1-20 meters in 0.5 meter increments
20-100	20-100 meters in 5 meter increments
100+	over 100 meters in 10 meter increments

Polish B	
P	PC
U	UPC
A	APC
M	Multimode

Connector B	
FC	FC
SC	SC
LC	LC
ST	ST
E2	E2000
MU	MU
OO	Other *

Polish A	
P	PC
U	UPC
A	APC
M	Multimode

Connector A	
FC	FC
SC	SC
LC	LC
ST	ST
E2	E2000
MU	MU
OO	Other *

Cable Diameter	
X	0.9 mm
Z	2.0 mm
C	3.0 mm
O	Other *

Ordering Example:

TSSYXFCASCA2 Patch Cord, G652D, Simplex, Yellow, 0.9mm, FC/APC-SC/APC, 2 meters

Note: *If the required type of any item is not on the relevant list, please use letter "O" or "OO" as the red cells indicate, and kindly state the required type in the description of PO.

34

Pigtails



➤ For more designs and details:
<http://www.lxtelecom.com/fiber-optics/pigtails.html>



Pigtail Catalog Number

W S S Y X FC A 2

Fiber Type	
S	G652D
D	G655
K	G656
P	G657A1
L	G657A2
B	OM1(62.5/125μm)
G	OM1(50/125μm)
Q	OM2(50/125μm)
W	OM3(50/125μm)
Y	OM4(50/125μm)
O	Other *

Assembly Length	
1-20	1-20 meters in 0.5 meter increments
20-100	20-100 meters in 5 meter increments
100+	over 100 meters in 10 meter increments

Polish	
P	PC
U	UPC
A	APC
M	Multimode

Cable Type	
S	Simplex
D	Duplex
F	4 cores
E	8 cores
T	12 cores
O	Other *

Connector	
FC	FC
SC	SC
LC	LC
ST	ST
E2	E2000
MU	MU
OO	Other *

Cable Colour	
Y	Yellow
B	Blue
W	White
O	Orange
G	Green
Z	Brown
S	Slate
R	Red
H	Black
P	Purple
F	Rose
A	Aqua

Cable Diameter	
X	0.9 mm
Z	2.0 mm
C	3.0 mm
O	Other *


Ordering Example:

WSSYXFC A2 Pigtail, G652D, Simplex, Yellow, 0.9mm, FC/APC, 2 meters

Note: *If the required type of any item is not on the relevant list, please use letter "O" or "OO" as the red cells indicate, and kindly state the required type in the description of PO.



» For more designs and details:
<http://www.lxtelecom.com/fiber-optics/connectors.html>

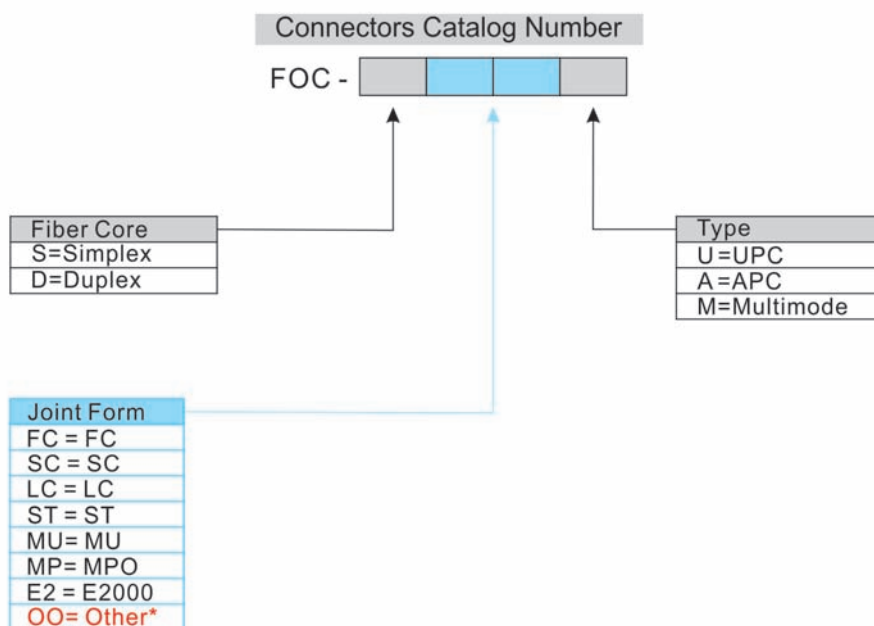

Ordering Example:
 FOC-SMUA Simplex, MU, APC


Note : *If the required type of any item is not on the relevant list, please use "O" or "OO" as the red cells indicate, and kindly state the required type in the description of PO.

36

Adapters



➤ For more designs and details:
<http://www.lxtelecom.com/fiber-optics/adapters.html>

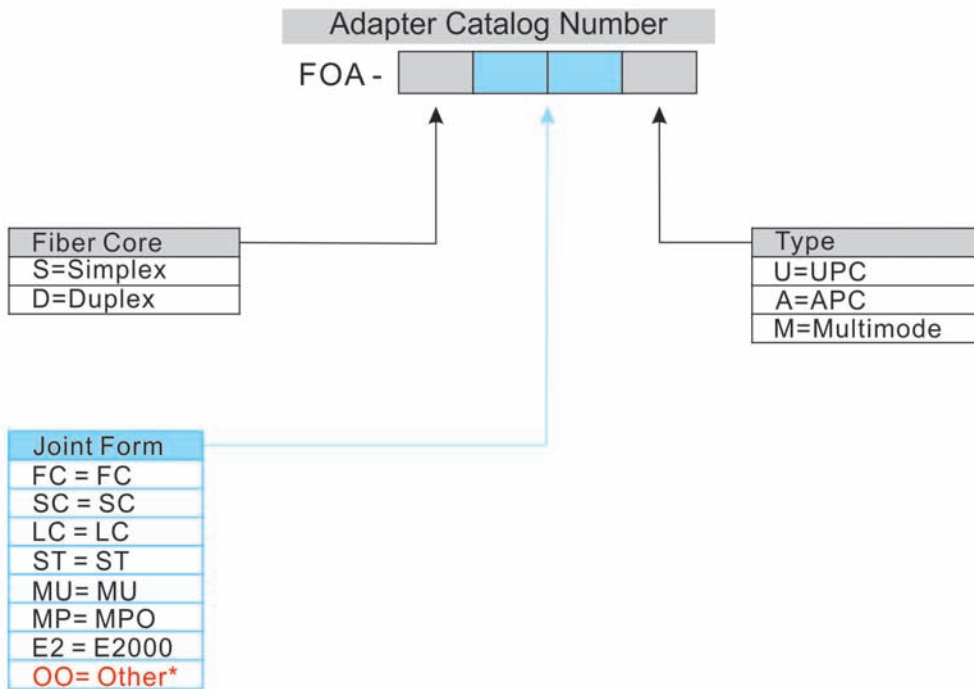

Ordering Example:

FOA-SFCU Simplex, FC, UPC

Note : *If the required type of any item is not on the relevant list, please use "O" or "OO" as the red cells indicate, and kindly state the required type in the description of PO.



➤ For more designs and details:


<http://www.lxtelecom.com/fiber-optics/accessories/field-installable-connector.html>

Overview


LongXing Fast fiber connector is used for field-installable optical fiber connector, widely used in Fiber To The Home (FTTH) access optical networks, not only for single-mode or multimode fiber, and can also choose to 900um,3 mm and the introduction of cable buffered type. With fast installation time and low insertion loss, the connector system provides a good alternative to fusion splicing. Installation is as easy as strip, clean, cleave cam and crimp.

Features

- Compatible with standard SC connectors.
- Field installable, cost effective, user friendly.
- UPC, APC polishing optional.
- Reliable durable and superior optical performance.
- Low insertion loss and high return loss.
- Stable capability and high reliability.
- Excellent mechanical capability.

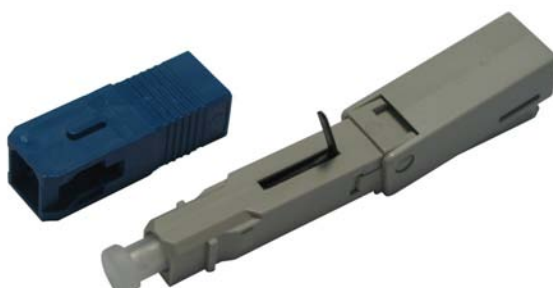

SC-UPC

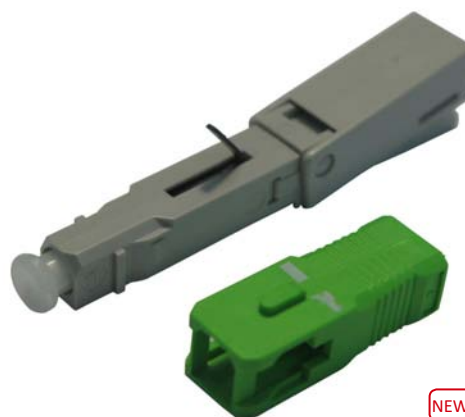

SC-APC

Technical Specifications		
Plug Yype	SC/UPC	SC/APC
Connector Length	51mm	51mm
Optical Fiber	2mm*3mm Butterfly Type	2mm*3mm Butterfly Type
Insertion Loss	Average ≤ 0.25dB, Max ≤ 0.5dB	Average ≤ 0.4dB, Max ≤ 0.6dB
Return Loss	≥50dB	≥60dB
Thermal Shock	≤0.30dB	
Storage / Operating Temperature	-40~+80	
Tensile Strength	≥30 N	
Average Assembly Time	≤2 minutes	
Assembly Repeatability	≥5 times	
One-Time Assembly Yield	≥98%	

38

Fast Connector



➤ For more designs and details:
<http://www.lxtelecom.com/fiber-optics/connectors/sc-fast-connector.html>

Features

No-epoxy/no-polish or other consumables required

Quick and easy installation, less than one minute per connector on average

100 percent factory tested for insertion loss

Typical insertion loss of 0.2 dB for UPC and 0.3 dB for APC connectors

Factory-polished end face

Low insertion loss and high-performance return loss

Reliable, proven mechanical splice technology

Over 70 million connectors deployed in various applications

No need for electrical power for ovens or lights

Reduces complexity

Angled Fiber Stub

Inside all LongXing connectors regardless of polish to maximize back reflection performance

Standards

Intermateability



Connectors are FOCIS compliant with TIA/EIA 604-3 (SC), FOCIS 10 (LC)

Approvals and Listings

Passed EIA/TIA 568-B.3

Design and Test Criteria

Telcordia GR-1209 and GR-1221

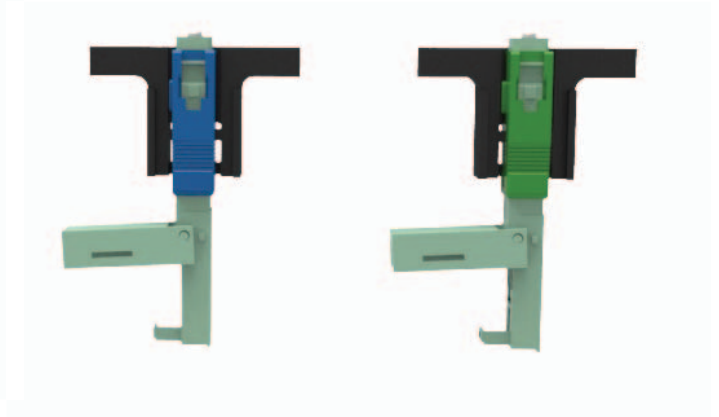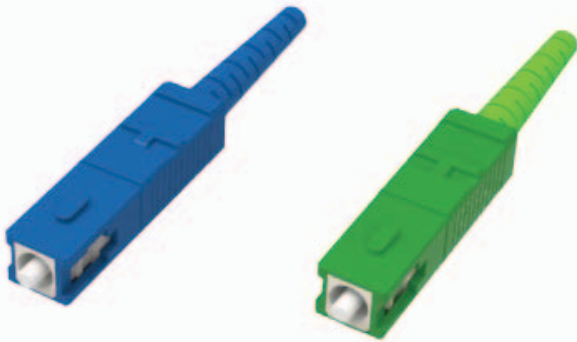

Technical Specifications	
Insertion Loss	Average $\leq 0.2\text{dB}$, Max $\leq 0.4\text{dB}$
Return Loss	UPC $\geq 40\text{dB}$, 55dB typical at 25 degrees C + 5degrees APC $\geq 55\text{dB}$, 60dB typical at 25 degrees C +/- 5degrees
One-Time Assembly Yield	$\geq 97\%$
Assembly Repeatability	≥ 5 times
Average Assembly Time	≤ 3 minutes
Life-Time	≥ 30 years
Tensile Strength	$\geq 30\text{N}$ (2.0x3.0 drop cable.)
Operation Temperature	-40 C ~+75 C



- LongXing optical splitters use Planer Lightwave Circuit (PLC) technology for split ratio 2, 4, 8, 16, 24, 32 and 64.
- Application for FTTX network, LAN/WAN or CATV network.
- Low Insertion loss, Low PDL.
- Good channel-to-channel uniformity.
- Wide Operating Wavelength: From 1260nm to 1650nm.
- Wide Operating Temperature: From -40°C to 85°C .

39

Splitter

➤ For more designs and details:
<http://www.lxtelecom.com/fiber-optics/splitters.html>



Micro Type



Cassette Type



Rack Type



Module Type 1



Module Type 2

Technical Specification

1×N Series

Parameters	1×4	1×8	1×16	1×24	1×32	1×64	1×64
Operation wavelength (nm)	1260 - 1650						1310 ± 40 1490 ± 10 1550 ± 40
Insertion loss (dB)	≤ 7.4	≤ 10.7	≤ 13.9	≤ 15.8	≤ 17.2	≤ 21.5	≤ 20.1
PDL	≤ 0.3	≤ 0.3	≤ 0.3	≤ 0.3	≤ 0.3	≤ 0.5	≤ 0.3
Uniformity of I.L	≤ 0.8	≤ 1.0	≤ 1.4	≤ 1.4	≤ 1.6	≤ 2.0	≤ 1.6
Return loss (dB)	≥ 55						
Directivity (dB)	≥ 55						
Working / Storage Temperature (°C)	-40 ~ + 85						

2×N Series





Parameters	2×4	2×8	2×16	2×32	2×64	2×64
Operation wavelength (nm)	1260 - 1650					1310 ± 40 1490 ± 10 1550 ± 40
Insertion loss (dB)	≤ 7.6	≤ 11.0	≤ 14.8	≤ 17.9	≤ 21.5	≤ 20.1
PDL	≤ 0.3	≤ 0.3	≤ 0.3	≤ 0.3	≤ 0.5	≤ 0.3
Uniformity of I.L	≤ 1.0	≤ 1.2	≤ 1.5	≤ 1.8	≤ 2.0	≤ 1.8
Return loss (dB)	≥ 55					
Directivity (dB)	≥ 55					
Working / Storage Temperature (°C)	-40 ~ + 85					

40

Cable Tray




» Download the full catalogue of cable tray: <http://www.lxtelecom.com/uploadfile/down/fiber-optics/optical-cable-tray/longxing-optical-cable-tray-plastic-ducting-datasheet.pdf>

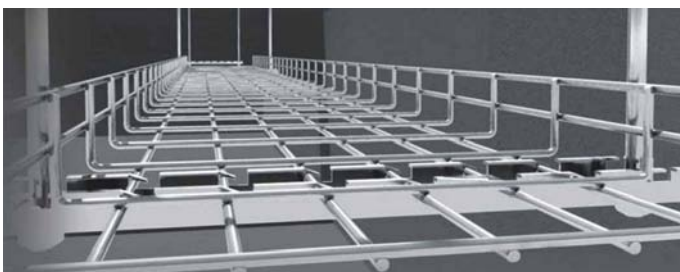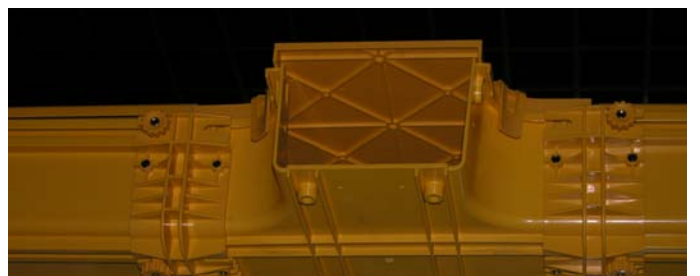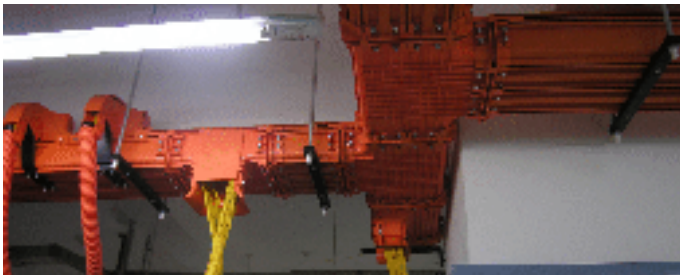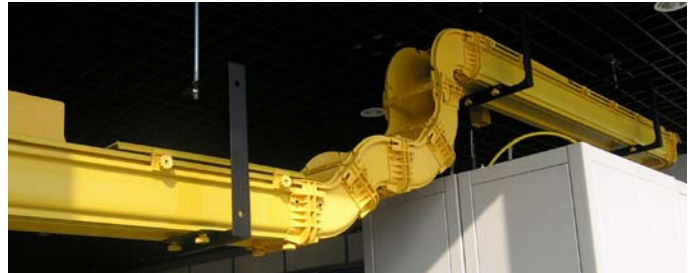



» Download the full catalogue of cable tray: <http://www.lxtelecom.com/uploadfile/down/fiber-optics/optical-cable-tray/longxing-optical-cable-tray-plastic-ducting-datasheet.pdf>

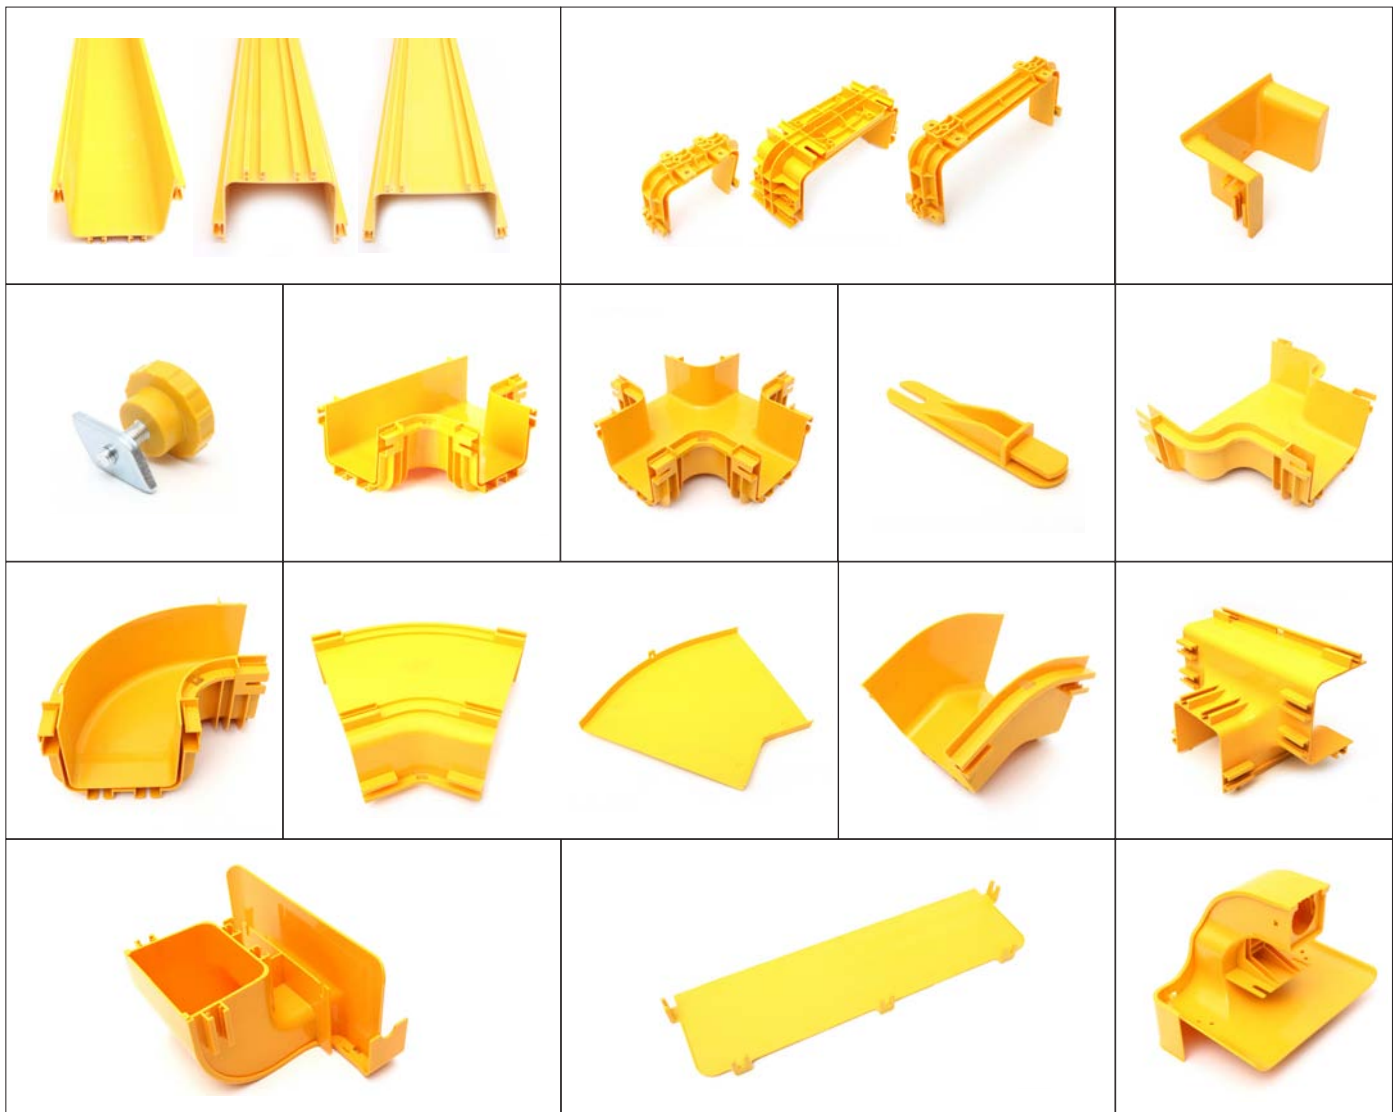

Color options

- ▶  Yellow
- ▶  Orange

Material Options for Straight Sections

- ▶ PVC
- ▶ ABS
- ▶ LSZH NEW

*All other accessories are LSZH.

Size

- ▶ 5" (120mmx100mm) NEW
- ▶ 6" (150mmx100mm)
- ▶ 10" (240mmx100mm)
- ▶ 12" (300mmx100mm)
- ▶ 15" (360mmx100mm) NEW

42


FTTH Accessories

Visit LongXing website for detailed information




➤ For more designs and details:
<http://www.lxtelecom.com/fiber-optics/accessories.html>


Cable



Drop Cable



Soft Optical Fiber



Waterproof Cable

Media Converter



Tools



Connector Cleaning Tools



Tool Kit Box

Cat5e Patch Panel



24 Port



48 Port



➤ For more designs and details:
<http://www.lxtelecom.com/active/rectifier-modules.html>



48V 1800W



48V 3000W

Applications

- BTS, fiber and switch telecom
- Network access
- Data center, powers server and computer
- Self protection and reliability

Design Standards



- Safety: IEC 60950-1
- EMC: EN 61000-6
- Environment: ETSI EN 300 019-2
- RoHS compliant

AC Input	
Voltage	85Vac~ 300Vac(nominal 100Vac to 240Vac)
Frequency	45Hz-65Hz
Power factor	≥0.99@220Vac/50A
Input protection	L-line fuse 15A Varistors for transient protection

Efficiency	
Standard	≥95.0%@220Vac@peak, ≥94.0%@220Vac@100% load
High	≥96.8%@220Vac@peak, ≥95.5%@220Vac@100% load

DC Output	
Voltage	+53.5Vdc
Output power	1800W(154Vac~300Vac), 900W(85Vac~154Vac)
Maximum current	33A
Current sharing	5%
Dynamic voltage regulation	±5.0% for 10-90% or 90-10% loadvariation, regulation time < 200us
load regulation	±0.5% from 10% to 100% load
Ripple and noise	< 200 mV peak to peak, 30 MHz bandwidth, < 2 mV rms psophometric
Output protection	Overvoltage shutdown Hot swappable - Inrush current limiting Fuse Short circuit proof High temperature protection

Output Current-Efficiency Curve

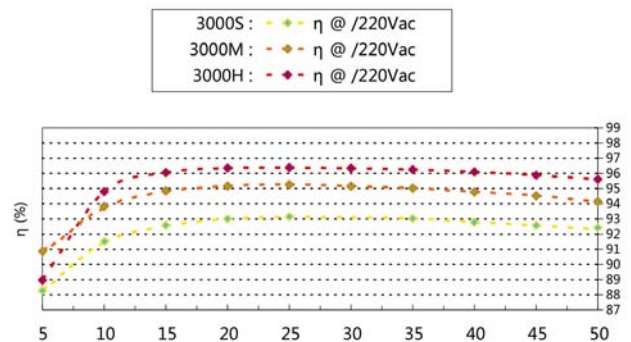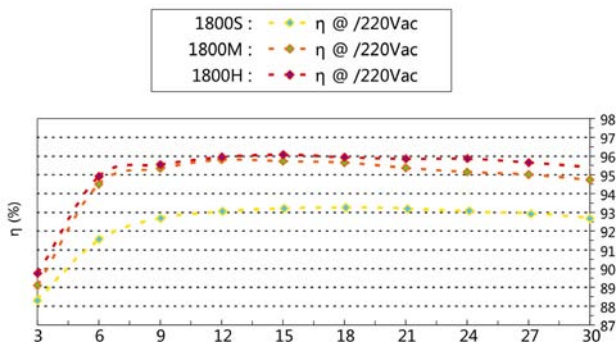



➤ **For more designs and details:**


<http://www.lxtelecom.com/active/communication-power-supply/monitoring-system-mc2000.html>

MC2000 is the new generation DC power controller module developed by LongXing. The Controller module adopts ARM7 CPU as primary controller, and RTOS as system platform. MC2000 offers many features and functions, and a more robust, user-friendly, and easy-to-use interface.



Key Functions	
Measurement	Analog value measurement
	Digital value measurement
Communication	The Controller can communicate with the host computer in three modes: RS232, RS485 and Ethernet (WEB and SNMP). It can communicate with the rectifiers in RS485 mode.
	For remote and local monitor system via WEB browser, controlling, parameters upload/download, data load.
	SNMP protocol supports GET, SET and TRAP on Ethernet.
DI/DO	8 user digital input interfaces freely configurable
	8 groups of dry contact outputs freely configurable
Screen and Leds	High resolution LCD screen display running information and local setting interface
	Green/Yellow/Red LEDS indicate running status for local instant diagnose.
Alarm history, event history store	200 alarms history and 1000 events history store, FIFO for system analysis.
Data log store(advanced version)	2000 data logs including bus voltage, load current, battery current and temperature with time tag.

Site Monitoring Solution

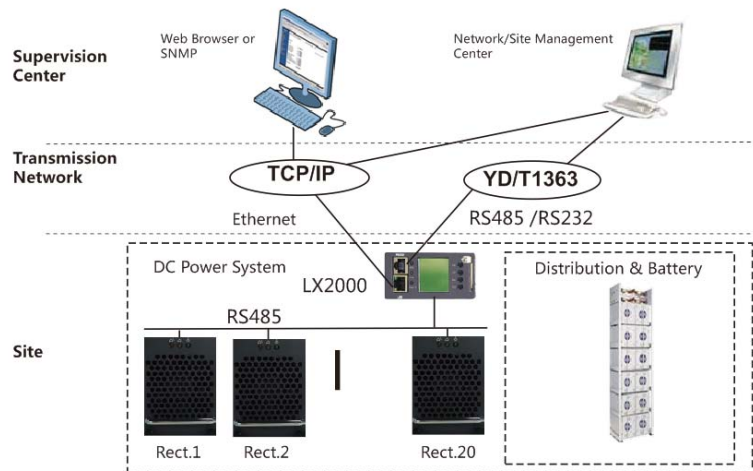



➤ For more designs and details:
<http://www.lxtelecom.com/active/communication-power-supply.html>



481000C



48500S



48400S



48200S



48200B



48120S **NEW**



4890S



4860S

Overview

The LXPower48S is specially designed to meet the demand for compact, flexible, high performance, high reliability power supply. The system consists of high/standard efficiency rectifier modules of their mixture, a MC2000 monitor module, AC/DC distributors

More relevant designs for your reference


Item	Mounting	Capacity	Reference Dimensions(mm)	Rectifier	Rectifier Quantities
4860S	Rack-mounted	48V 60A	1Ux482.6x378	1800	2
4090S	Rack-mounted	48V 90A	3Ux482.6x378	1800	3
48120S	Rack-mounted	48V 120A	6Ux482.6x378	1800	4
48200S	Rack-mounted	48V 200A	6Ux482.6x378	3000	4
48400S	Rack-mounted	48V 400A	9Ux482.6x378	3000	8
48500S	Rack-mounted	48V 500A	10Ux482.6x378	3000	10
48200B	Wall-mounted	48V 200A	701.5x500x350	3000	4
481000C	Inndor Cabinet Type	48V 1000A	2200x600x600	3000	20

46

Power Distribution Units



➤ For more designs and details:
<http://www.lxtelecom.com/active/power-distribution-units.html>

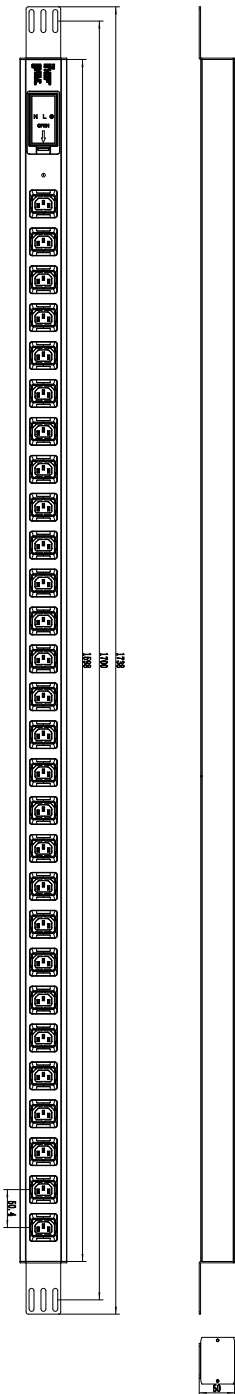


LongXing Network Power's Rack PDU Systems is a family of products that delivers power and management to connected IT equipment through a global and comprehensive offering including Basic, Managed and Adaptive Rack PDU systems.

Each of the Rack PDU systems LongXing offers is well-suited for delivering power to sensitive, high capacity, rack-mounted equipment. Determining which is best for a particular installation requires knowing the basic power requirements of the equipment in the rack, deciding on the acceptable or preferable level of monitoring and control and then balancing those considerations against site requirements.

The LongXing Rack PDU product line includes models to fit all types of installations: new or established; stable or rapidly changing; contracting or expanding. Each type of installation may require any or all types of LongXing Rack PDUs.


After determining your requirements, refer to the data and specifications for each product.

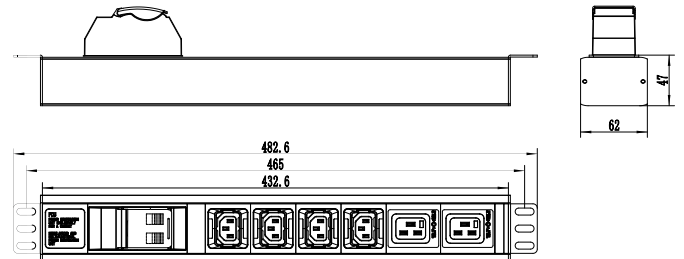

Optional Output Units

IEC	IEC60320 C13 Anti-shedding	IEC60320 C14	IEC60320 C20	IEC60320 C19
Australia	AS/NZS 3112(A)		AS/NZS 3112(K)	
France	NFC61-314(1U)		NFC61-314(1.5U)	
Germany	DIN49440(1U)		DIN49440(1.5U)	
Israel	SI 32			
Italy	Italy Universal	IEC60320 C13 Anti-shedding	IEC60320 C19 Anti-shedding	IEC60320 C13
South Africa	RSA546			
United Kingdom	BS1363(1U)		BS1363(1.5U)	BS1363(EA)
United States	NE MA5-20R		NE MA5-15R	

FCM-II compact type busbar system fully comes from the technology form UK Gardermoen Electric, and it's also combined with the electrical environment, enjoys elaborate R&D, safe and reliable performance, and also attractive appearance. The product conforms to GB7251 and IEC60439 standard, with the rated voltage 1000V, rated current ranges from 400A to 6300A, 16A to 1250A plug-in current, and the max protection IP66, it can be applicable to 3P3W, 3P4W and 3P5W system etc. FCM-II enjoys the best overall performance in low voltage busbar field, and gets a wide use in large commercial plaza, high-rise buildings, intelligent building, gymnasium, industrial factories, hospitals and other important occasions.

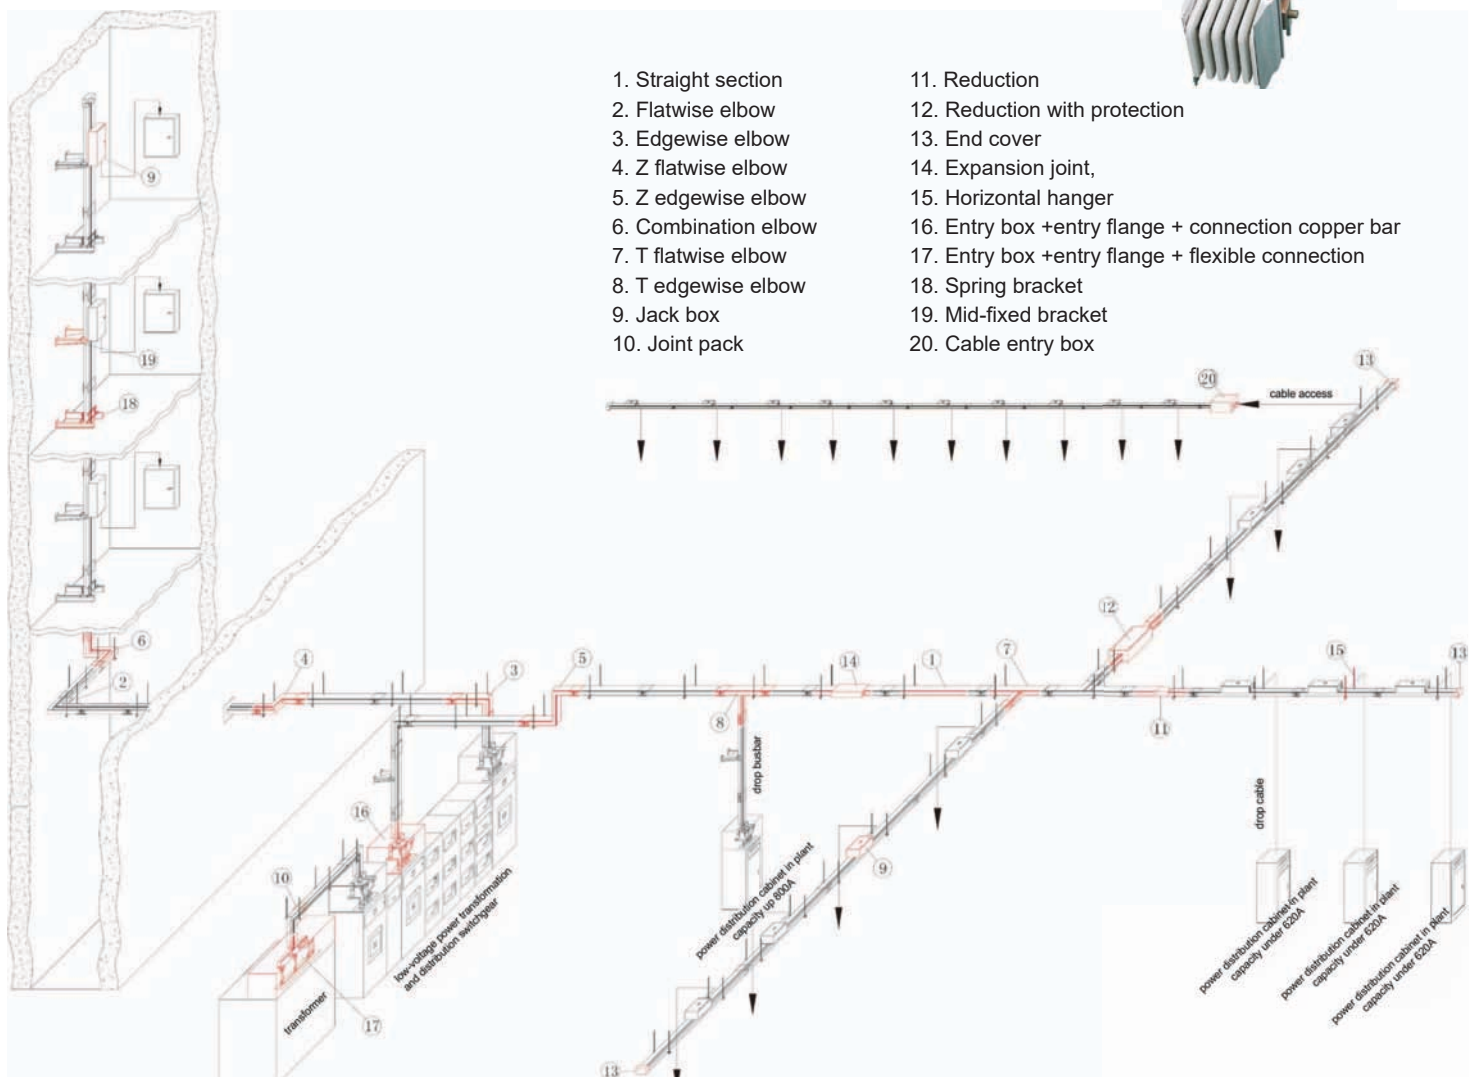

48

Network Cabinet / Rack

- Network cabinets for data centers & central offices.
- 19" - 23" racks.
- Options for front & rear door styles.
- Customized designs available upon request.
- Accessories pre-installation available. E.g. fans, PDU...



» For more designs and details:
<http://www.lxtelecom.com/fiber-optics/network-rack-cabinets.html>

Available Door Options



NPX06-Z1



NPX06-Z2



NPX06-Z3



NPX06-Z4



NPX06-Z5




NPX06-Z6



NPX06-Z7



NPX06-Z9

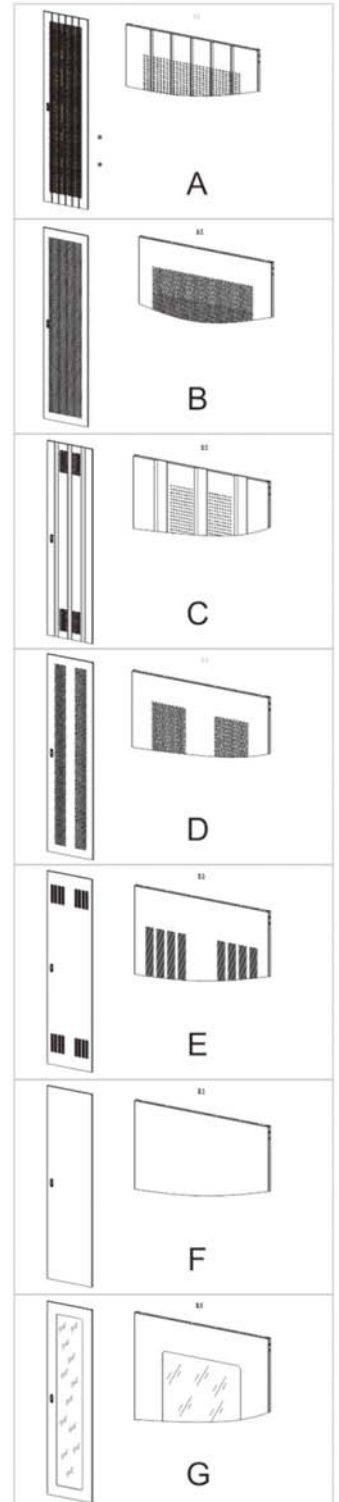




» For more designs and details:
<http://www.lxtelecom.com/copper/main-distribution-frames.html>



JPX48-3 MDF

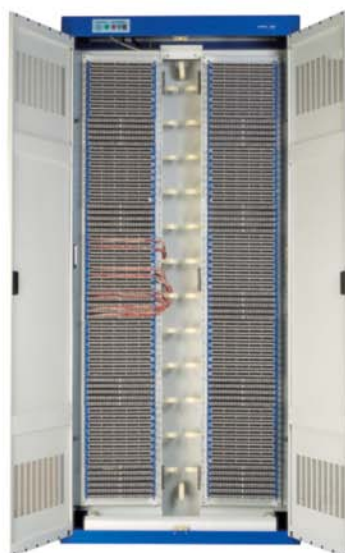

JPX48-5 MDF

MDF Modules



STO40-3a



FA8-40-3

MDF Modules



FA8-40-10



STO40-10



Warning device for MDF (mounted on top of the frame)



Indoor wall-mounted cable distribution box



Indoor wall-embedded cable distribution box



VDF

Krone module



JPX48-5 protection module (FA8-40-5)



JPX48-5 testing module (STO40-5)


50

Digital Distribution Frame (DDF)



» For more designs and details:
<http://www.lxtelecom.com/copper/digital-distribution-frames.html>

75Ω DDF

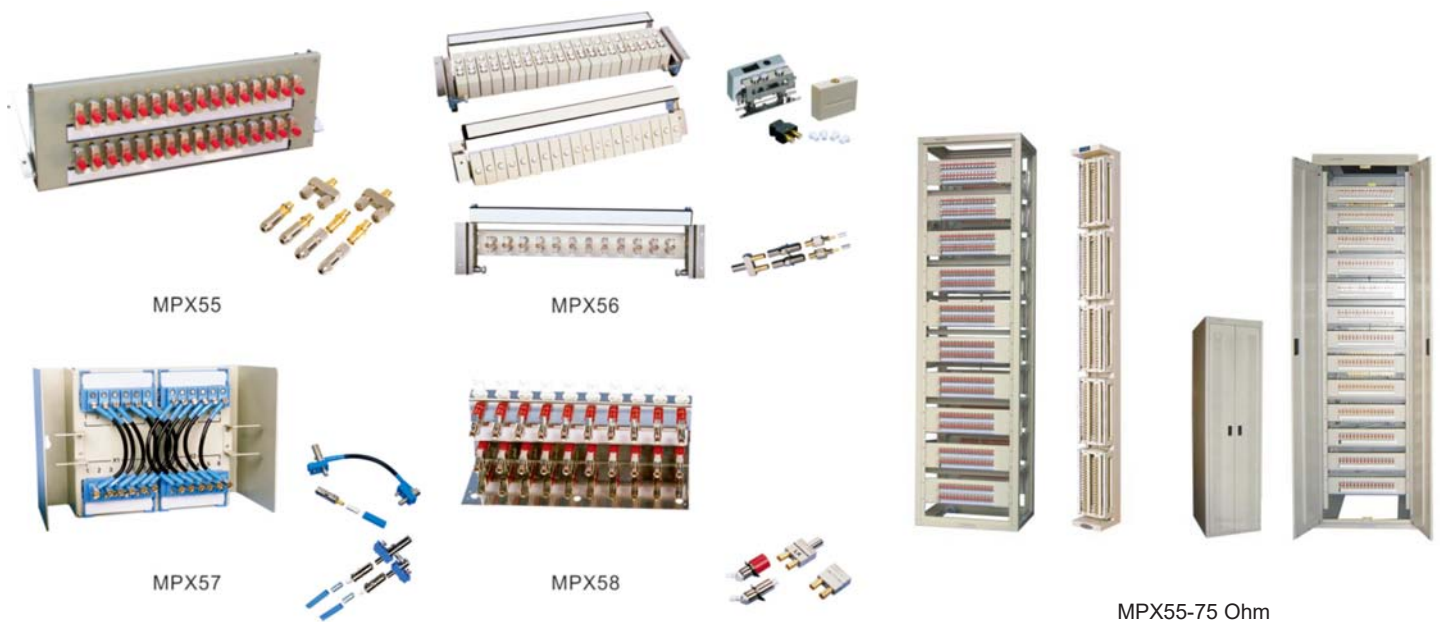

MPX55

MPX56


MPX57

MPX58

MPX55-75 Ohm

» For more designs and details:
<http://www.lxtelecom.com/copper/digital-distribution-frame-units.html>

120Ω DDF

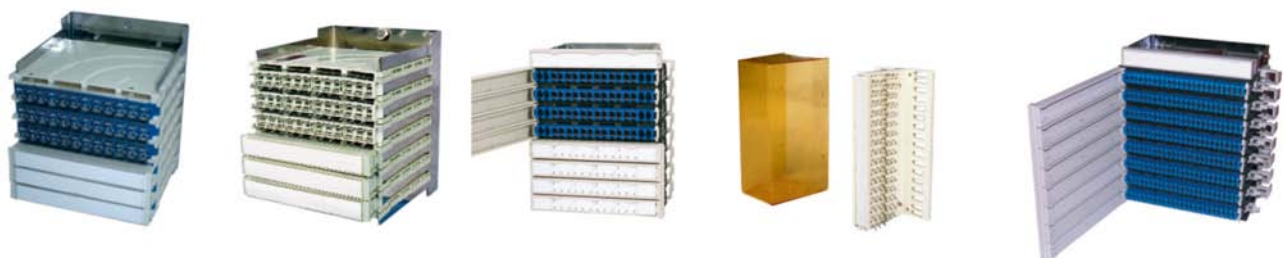

MPX55-KU24

MPX55-KU24

MPX55-KU32

MPX55-RU32

MPX55-KU64



Remarks:

A series of horizontal lines for taking notes or recording remarks.



Remarks:

A series of horizontal lines for writing, starting with a thick line and followed by many thinner lines.

Factory Overview



Metal Sheet Workshop



Fiber Optic Workshop



Welding Workshop



Laser Cutting



Painting Workshop



Assembly Workshop I



Assembly Workshop II



LONGXING

LONGXING

Add: 18 Anju Road, Beilun, Ningbo, 315800, China

Tel: +86 574 87917627 (English & Chinese)

Fax: +86 574 87908188

Postcode: 315800

Email: sales@lxtelecom.com

Website: www.lxtelecom.com

Ver. PG170817



Recycled Paper

ATTENTION:

Specifications published here are current as of the date of publication of this document. Because we are continuously improving our products, LongXing reserves the right to change specifications without prior notice. At any time, you may verify product specifications by contacting LongXing.